



where inspiration flows

# CAMEO




Installation Guide  
Wall mounted mono basin mixer


This instruction booklet covers these models:

CAM-109S, CAM-209S  
(All finish options)

CAM-109S  
CAM-209S

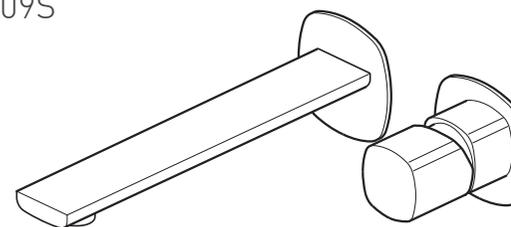

CAM-109S

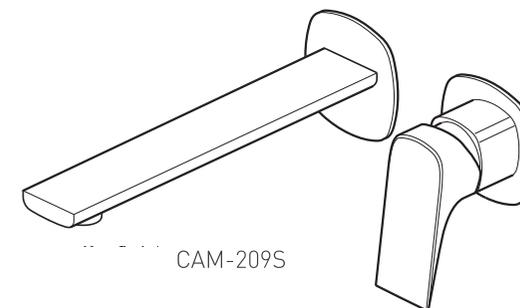

CAM-209S

### Cleaning Instructions

If these instructions are not followed, your guarantee may be invalidated.

- Clean only with water and a soft damp cloth
- Do not use any aggressive/corrosive cleaning products
- Do not use abrasive cloths

Due care needs to be taken to ensure the appearance is retained.  
For further cleaning instructions, please consult this product's user guide.

Keep for future reference

Vado  
Wedmore Road, Cheddar, Somerset, England BS27 3EB  
tel 01934 744466. fax 01934 744345  
aftersales@vado.com  
www.vado.com



## Important - please read

Please read these instructions carefully before starting installation and keep for future reference.

Remove all packaging and check the product for missing parts or damage before starting installation.

Any alterations made to this product and fittings may infringe water regulations and will invalidate the guarantee.

The installation must comply with all Local/National Water Supply Authority Regulations/Byelaws and Building and Plumbing Regulations.  
To be installed in accordance with BS EN806.

We strongly recommend that you use a qualified and registered plumber.

## General installation

This fitting is a mixing device and therefore water supplies should be reasonably balanced.

When installed, the fitting must comply with the requirements of the Water Supply (Water Fittings) Regulations 1999 and Scottish Byelaws 2004.

For further information, contact the Water Regulations department of your local water supplier (see the WRAS website [www.wras.co.uk](http://www.wras.co.uk) for details) or the Water Regulations Advisory Scheme by email ([info@wras.co.uk](mailto:info@wras.co.uk)) or telephone: 01495848454.

Before making any inlet pipe connections, all supply pipes MUST be thoroughly flushed to remove debris. Failure to do so could result in damage or low flow from the mixer unit. Water Supply (Water Fittings) Regulations 1999 Schedule 2 Section 13.

The fitting of isolating valves to the inlet feeds is advised for ease of maintenance.

Please take great care when installing this mixer not to damage its surface.

Please note if installing in an enclosed environment, access should be left for servicing and maintenance. No costs relating to inadequate access can be accepted.

## Operating Specifications

### Operating Pressure

Minimum operating pressure **1 bar** \*


Maximum operating pressure **5 bar**

\* **0.2 bar** if using Low Pressure variant


## Contents of Packaging




Installation guide &  
User manual  
to suit your model

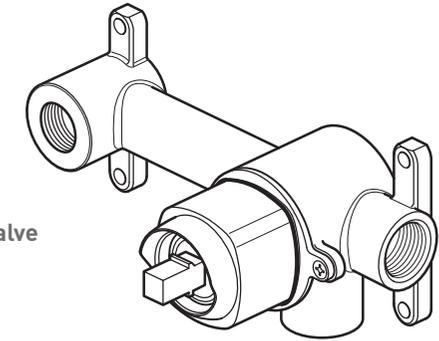


Valve

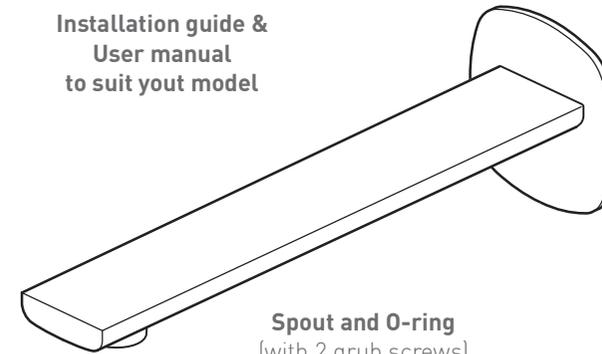

Spout and O-ring  
(with 2 grub screws)




Shroud



Handle and screw cap  
for CAM-109S




Spigot



Fixing kit


Screws Wall plugs

Hex key




Handle and screw cap  
for CAM-209S



## Dimensions - valve

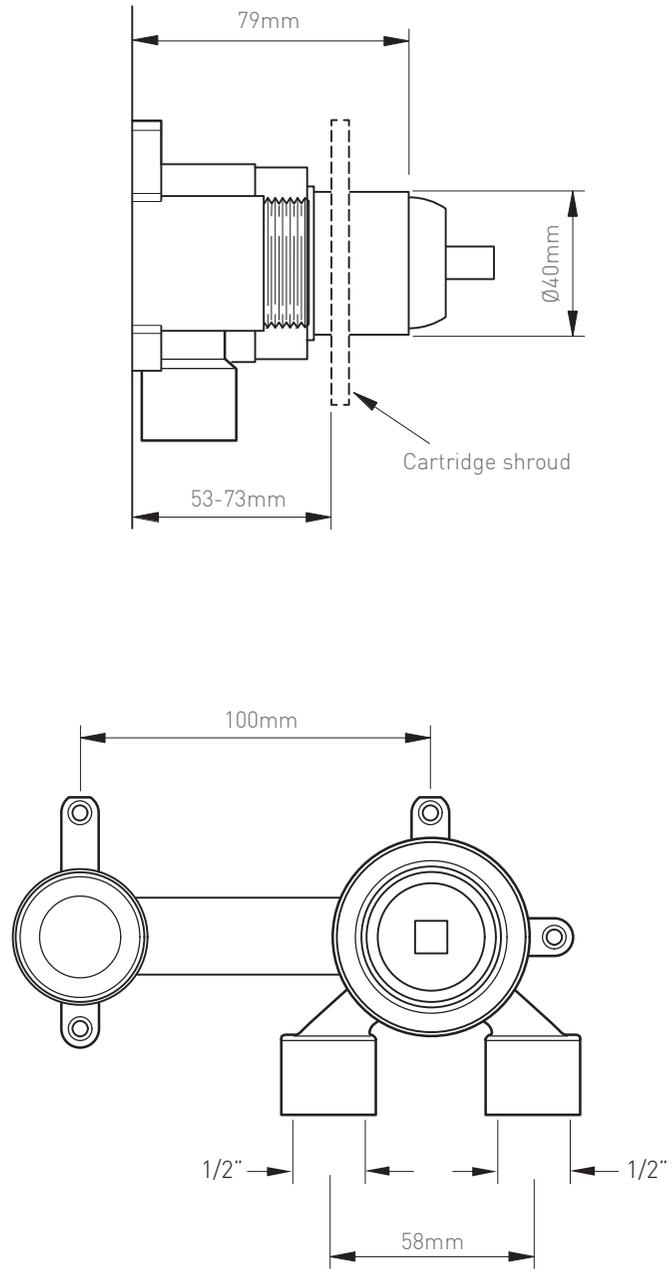



## Dimensions - CAM-109S

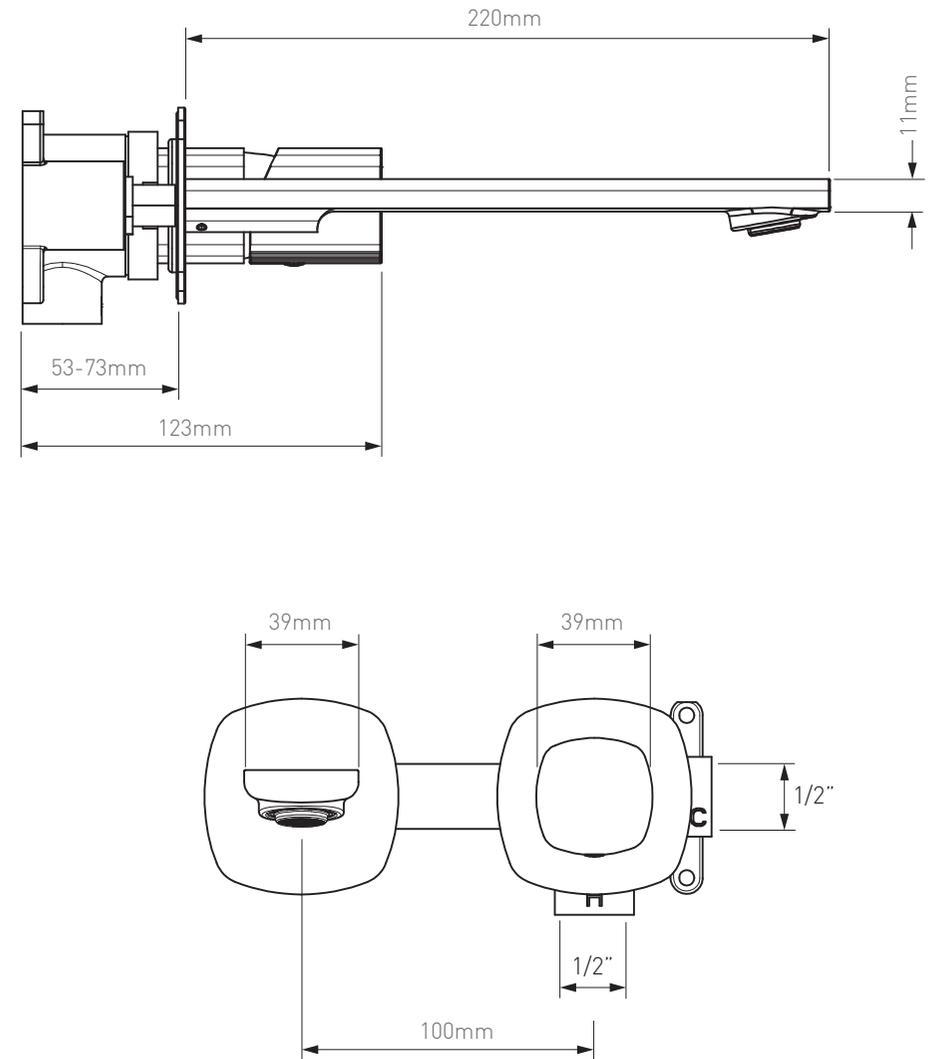



# Dimensions - CAM-209S

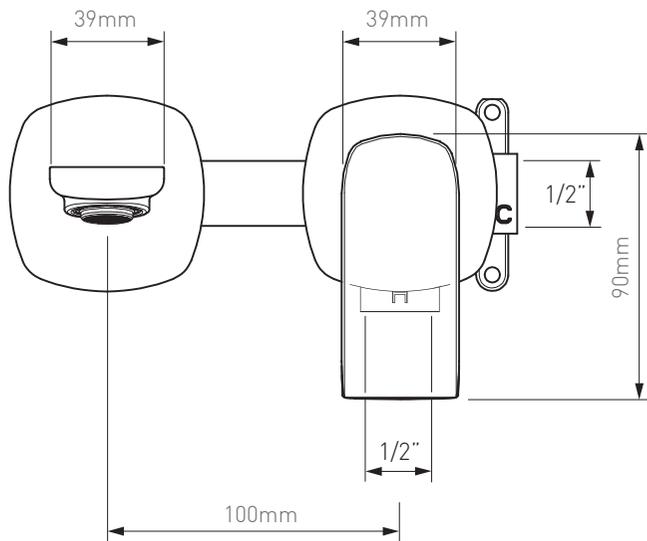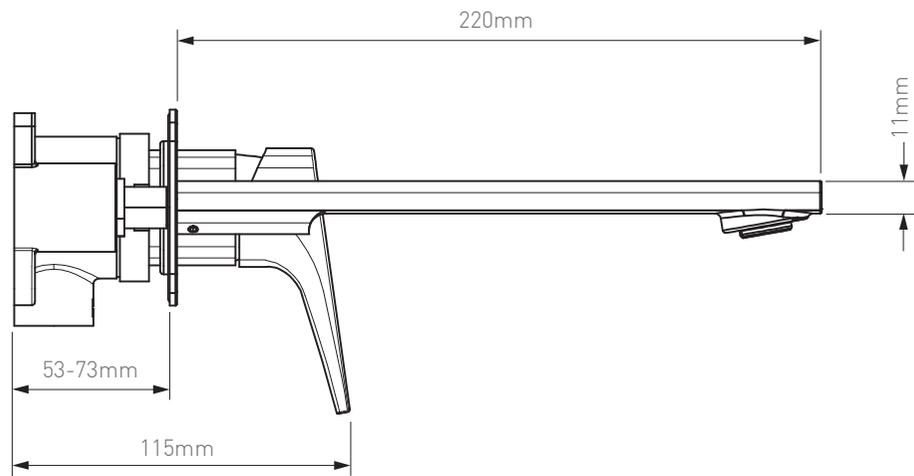


# Installation - Quick guide

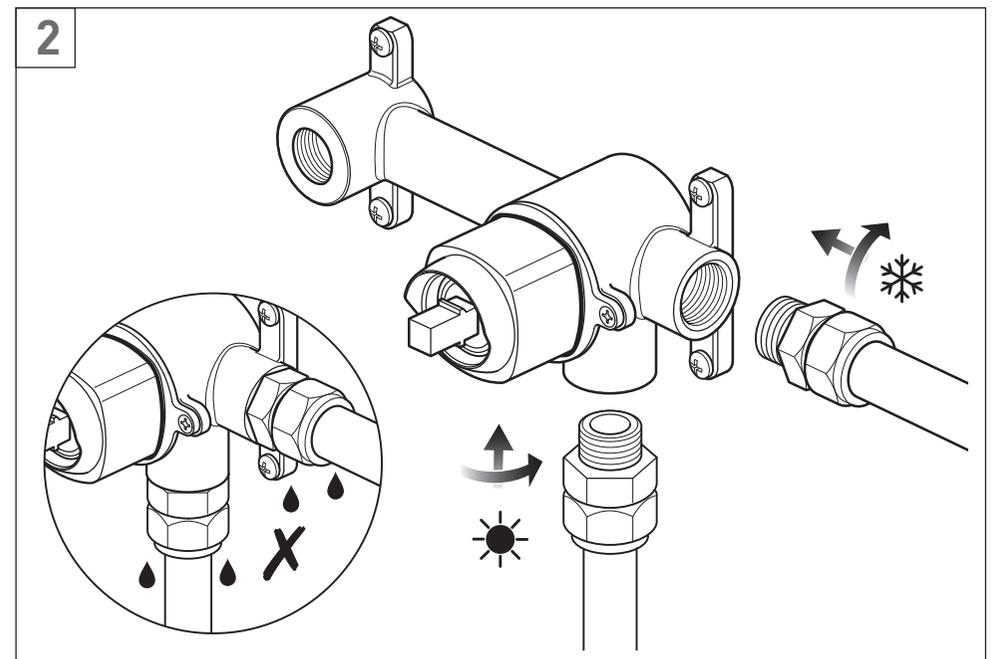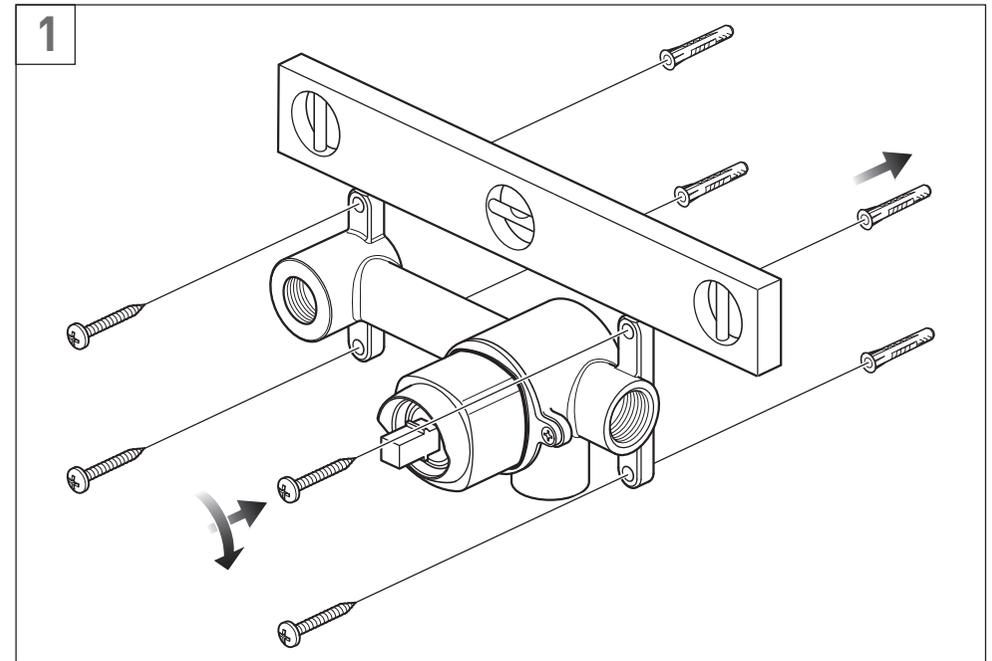


# Installation - Quick guide

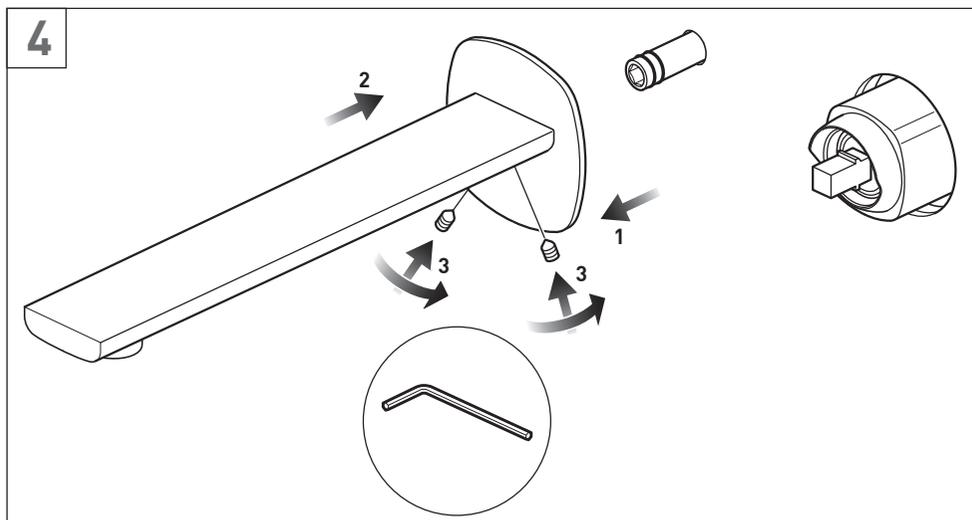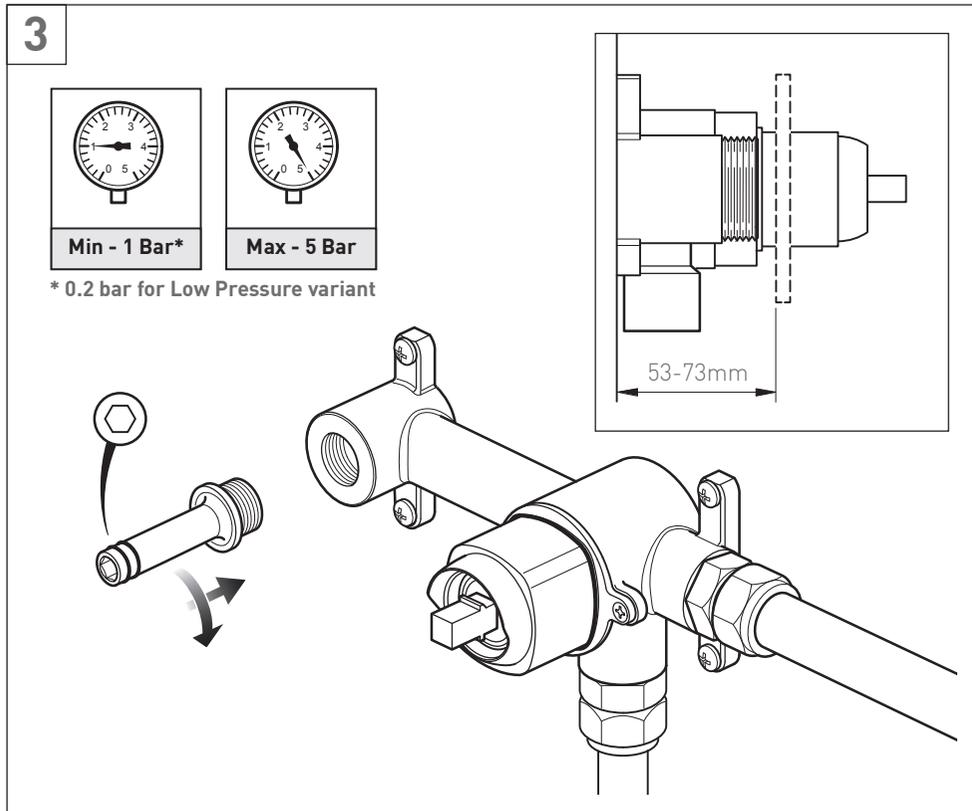

# Installation - Quick guide

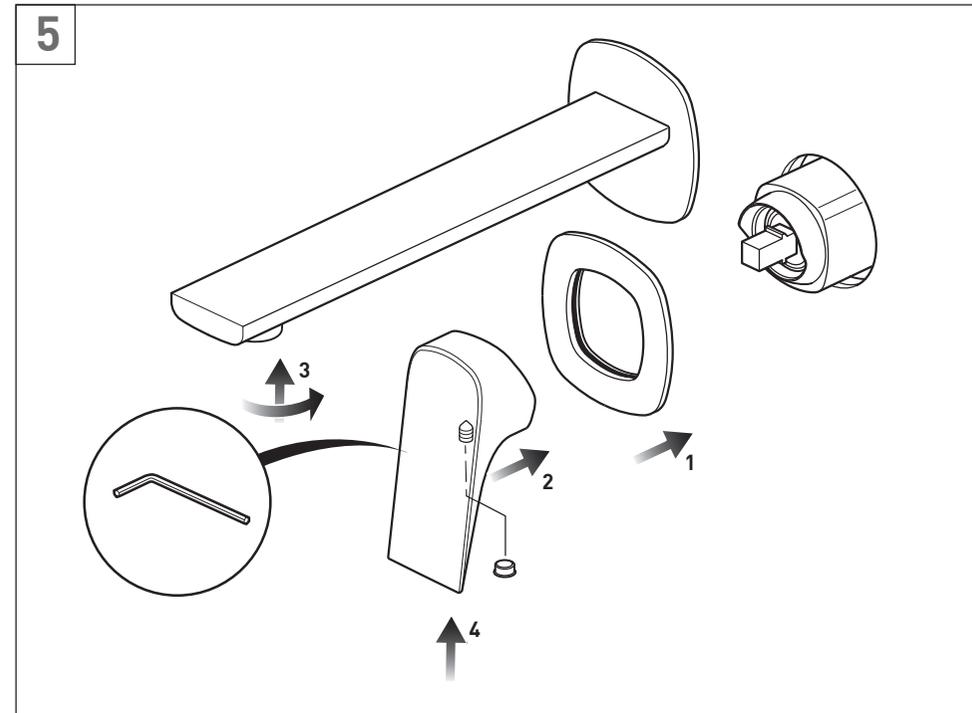

## Installation

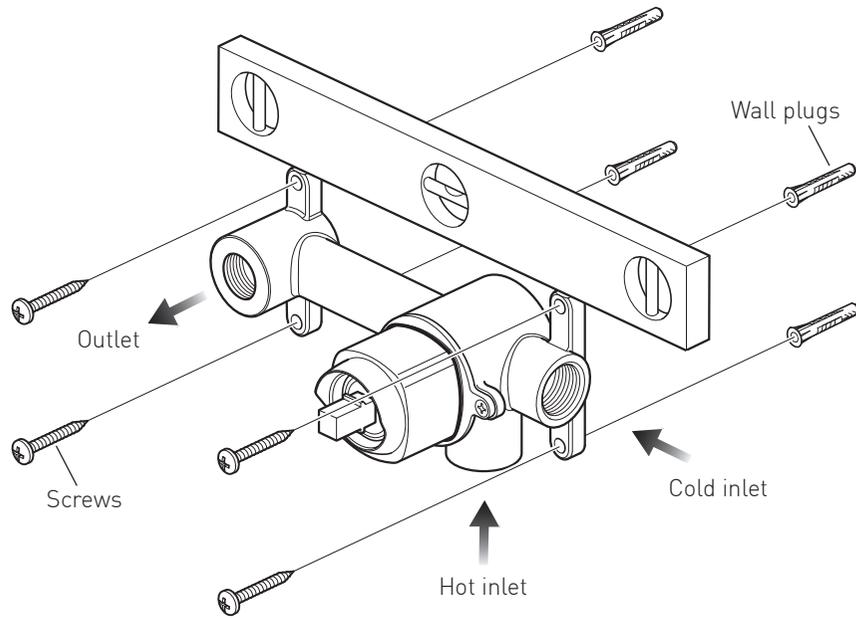

**Please note:** For illustration purpose the **CAM-209** is shown throughout this installation. Please follow the same procedure for the **CAM-109**.

**Warning!** Please check for any hidden cables and pipes before drilling holes in the wall.

Before installing your new mixer, flush through pipe work to ensure removal of debris, turn off the water supply.


The valve must be set into the wall. Please see page 4 for depth requirement dimensions.

Offer the valve up to the wall making sure it is level, mark the 4 wall fixing positions and drill holes to take suitable wall plugs and screws. Fix in position.


Make all connections to the valve. Connect hot supply to the left inlet and cold supply to the right inlet. Check for leaks.

Screw the spigot into the valve and tighten with hex key.


Before completing the wall finish, turn water supply on, check the leak tightness and function of the fitting..

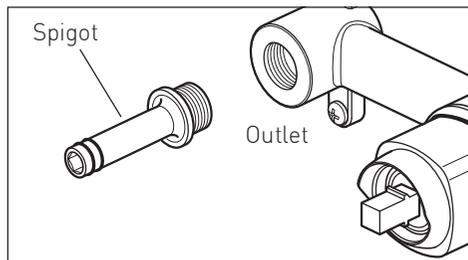

## Installation

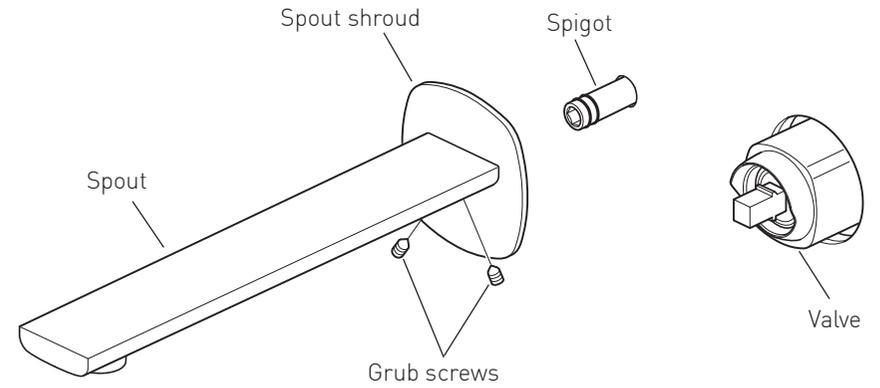

Make sure that the O-ring is in place in the back of the shroud. Slide the spout over the spigot until the shroud is in contact with the wall. Secure the spout using the two grub screws on the underside, tighten with the supplied hex key.

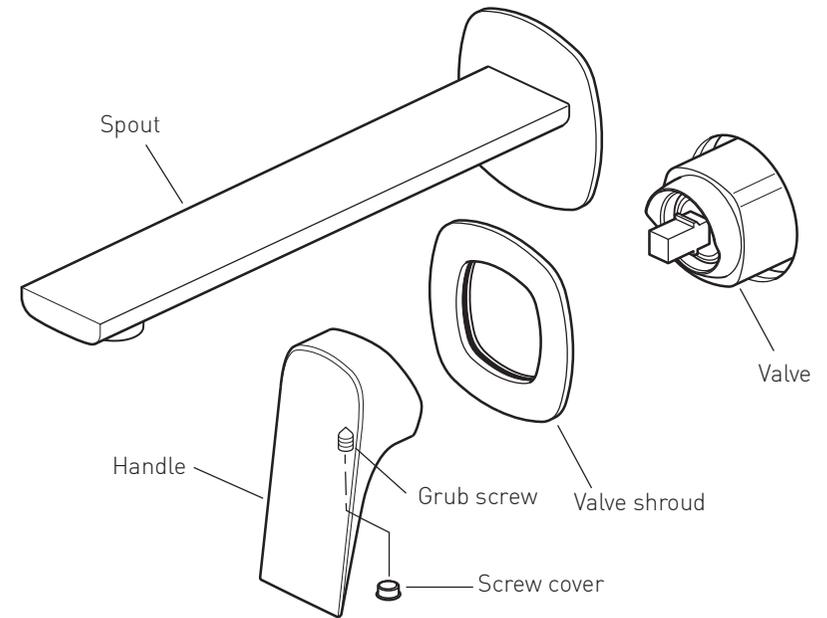

Make sure that the O-ring is in place in the back of the shroud. Slide the shroud carefully over the valve being careful not to dislodge the seal on the inside. Carefully slide the control handle onto the valve. Secure in position with the grub screw within the handle using the hexagonal key supplied. Push on the screw cover.