SPECIFICATION SHEET

COLLECTION: SAFARI

PRODUCT CODE: SAF-248D-PEW



VALVE TYPE

Concealed

STYLE

Round

ORIENTATION

Vertical

NUMBER OF OUTLETS

1 Outlet

HANDLES

2 Handle

WITH ALL-FLOW FUNCTION

Νo

WITH INTEGRATED DIVERTER

No

COMPATIBLE WITH STUDFAST

No

WITH BLEED VALVE FOR SYSTEM FLUSH ON INSTALLATION

Yes

tel: 01934 744466 email: sales@vado.com

www.vado.com

WHERE INSPIRATION FLOWS



SPECIFICATION SHEET

COLLECTION: SAFARI

PRODUCT CODE: SAF-248D-PEW

WITH SHOWER KIT

Νo

OPTIMUM INSTALLATION DEPTH

82mm

INCLUDES MORTAR / TILE GUARD

Yes

COMPATIBLE WITH EASY-FIX BRACKETS

No

WITH THERMOSTATIC TECHNOLOGY

Yes

MIN-MAX WALL MOUNT

70-95mm

CONNECTIONS / FITTINGS

 $2 \times 3/4$ " female inlets, $1 \times 3/4$ " female outlet inc. bleed valve for system flush on installation, thermostatic cartridge V-704-34S, flow cartridge C-301-RTC

MOUNTING

Wall Mounted

PLUMBING SYSTEM SUITABILITY

Gravity System, Combination Boiler

COLLECTION NAME


Safari

FINISH

Pewter

MINIMUM OPERATING PRESSURE

0.2 Bar LP



www.vado.com





SPECIFICATION SHEET

COLLECTION: SAFARI

PRODUCT CODE: SAF-248D-PEW

MAXIMUM OPERATING PRESSURE

5.0 Bar HP

GUARANTEE

10 Year Guarantee

tel: 01934 744466 email: sales@vado.com


www.vado.com



TECHNICAL DRAWING

COLLECTION: SAFARI

PRODUCT CODE: SAF-248D-PEW

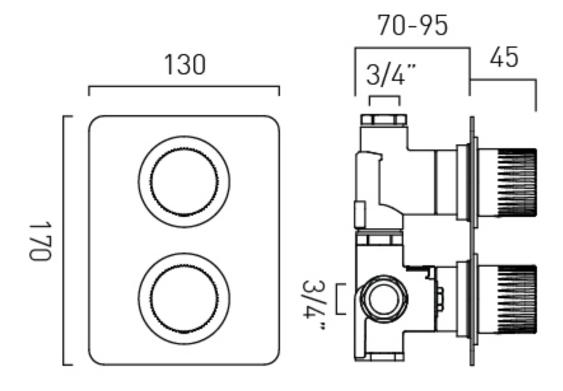



www.vado.com



