



Clifestyle luxury



Towel Rails and Radiators Vogue UK Est 1990

be inspired of

V®GUE



Welcome to Vogue UK – the country's leading manufacturer of heated towel rails, designer radiators and accessories. Established in 1990 within the heart of the West Midlands, and still privately owned by its original founders, Vogue UK continues to design and create more products than any other company in this field, constantly leading the trend by combining fashion with functionality.

Everyone has their own sense of style and that's why Vogue UK has created a range of products that meet the needs of every interior design style. If you require something unique then our craftsmen can create a design to your exact brief. As Vogue UK have been creating towel rails and designer radiators since 1990 the company has built an extensive portfolio of designs and can offer a bespoke service, ideal if you're looking to create an authentic period look or simply match an existing design.

Our six categories of products in this brochure and on our website are sure to encompass the perfect design for you..... no matter what shape, style or size you're looking for.

CONTEMPORARY LADDER RAILS TRADITIONAL DESIGN RADIATORS ELECTRIC ADDITIONS













Bespoke Design & Manufacture Service

'Liberty to Customise'

If your exact requirements are not illustrated within our literature, we offer a bespoke service. This service allows you to customise your towel rail or radiator dimensions, materials and finishes.

'Freedom to Realise Your Ideas'

We can work from any design specification and handcraft special products from high quality brass or stainless steel. Our team will offer technical advice to ensure your design is viable before a quote is issued for approval and the product is manufactured.

'Commissioned Project Expertise'

We are dedicated to combining innovative design with a high level of client services. This collaborative design process involves the active participation of you, our client.

We help clarify visions, execute 3D designs and manufacture the bespoke end product.

Every effort is made to ensure the design process is swift. Vogue UK has extensive experience working with architects, contractors and individuals alike.

Symbols and Product Information

Brass Manufacture



DZR Brass

The highest quality brass available in a finish of your choice. Corrosion resistant and provides a superior plated finish.



A 30 year quality assurance guarantee

On our brass products showing this symbol.



Heating and Hot Water

Suitable for all heating and hot water systems.

Stainless Steel Manufacture



Stainless Steel

Giving an easy to clean finish that is resistant to corrosion and has a high heat output.



A 30 year quality assurance guarantee

On stainless steel products showing this symbol.



Heating and Hot Water

Suitable for all heating and hot water systems.

Mild Steel Manufacture



Mild Steel

Quality mild steel available in chrome and painted finishes suitable for indirect /closed heating systems.



A 15 year quality assurance guarantee

On mild steel products showing this silver symbol.



Heating Only

Suitable for closed indirect heating systems.

Additional Requirements



Electric only

Can be specified where this symbol is displayed. Please see page 131 for full range and price supplements.



Heating and Electric

Can be specified where this symbol is displayed. Please see page 131 for full range and price supplements.



Available in RAL colour chart options, where this symbol is displayed. Please see page 137 for colour options and price supplement.

Stock Information



The 'Tick' symbol in the product specification tables denotes a stocked item.



The 'Handprint' symbol in the product specification tables denotes a made to order product.



belish I

V©GUEContemporary Towel Rails

For the past 25 years we have been proud to be at the forefront of new designs. Every year we work with interior designers to produce products of style with substance.



CONCERTINA Wall Mounted DR010





Concertina is a beautiful iconic rail. Towels slide easily in from the side and can be left or right hand mounted. Manufactured from high quality mild steel. Prices shown are for chrome finished for central heating models.

Concertina	Dimensions (mm)		Bar	Pipe	Output	Output	Electric	Stock	
MS 15 C	Н	W	D	config	Centres	ΔT50°C BTU's	Δ T50°C Watts	element wattage	or made to order
DR010	1000	500	116	10	75	771	226	200	√
DR010	1000	600	116	10	75	1061	311	200	
DR010	1200	500	116	14	75	1308	383	200	/
DR010	1200	600	116	14	75	1443	423	300	1




The Marine's innovative design is a focal point for any bathroom. The looped horizontal rails maximise both heat output and hanging space. Available finishes are chrome plated or white. Manufactured from high quality mild steel. Prices shown are for chrome or white finished for central heating models.





Marine	Dimensions (mm)		Bar config	Pipe centres	Electric element	Output Δ T50°C BTU's		Output ΔT50°C Watts		Stock or made	
MS 15 C	Н	W	D			wattage	chrome	white	chrome	white	to order
DR009	1400	600	182	25	110	200	2617	3077	767	903	√

CYGNUS Wall Mounted DR012

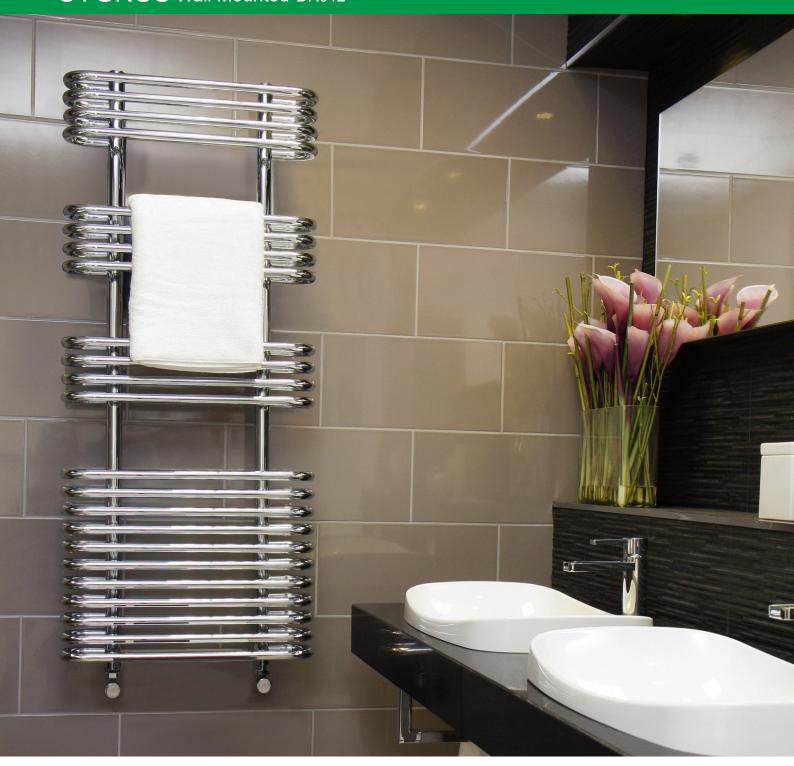

Cygnus is handsome and highly practical. The looped horizontal rails maximise both heat output and hanging space. Finished in chrome. Manufactured from high quality mild steel. Prices shown are chrome finish for central heating models.



Cygnus	Dimensions (mm)			Bar	Pipe	Output ΔT50°C	Output Δ T50°C	Electric	Stock
MS 15 C	Н	W	D	config	centres	BTU's	Watts	wattage	or made to order
DR012	900	500	183	4-4-10	300	1423	417	150	✓
DR012	1200	500	183	4-4-4-11	300	1897	556	200	/





For other electric & valve options see pages 131 & 135

Draco's equally spaced hooped tubes form an architectural shape. Perfect symmetry with centralised valves. Finished in chrome, a must for any modern setting. Manufactured from high quality mild steel. Prices shown are chrome finish for central heating models.

Draco	Dime	nsions	(mm)	Bar	Pipe	Output	Output	Electric	Stock
MS 15 C	Н	W	D	config	centres	ΔT50°C BTU's	Δ T50°C Watts	element wattage	or made to order
DR015	1000	500	180	9	86	808	236	125	✓
DR015	1300	500	180	13	86	928	272	150	\checkmark

INTTRA Wall Mounted CN013



When space is limited... You still want good design and high heat output, the Inttra ticks all the boxes. The towel rail fits neatly into a corner to maximise wall space and is available in two sizes. Manufactured from large diameter brass or mild steel tube and chromed to a mirror finish. Bespoke finishes are available at an additional cost. Please see pages 137 & 138 for finishes and colour options. Prices shown are chrome finished for central heating systems. Colour options for brass models only.



Inttra	Dime	nsions	(mm)	Bar	Pipe	Output	Output	Electric	Stock
MS 15 C	Н	W	D	config	Centres	BTU's	Watts	element wattage	or made to order
CN013-MS	1240	500	350	5-5-5	326 + 475	1792	452	200	√
CN013-MS	1680	500	350	5-5-5-5	326 + 475	2399	605	300	\checkmark
Inttra	Dime	nsions	(mm)	Bar	Pipe	Output	Output	Electric	Stock
Inttra BR 30 H	Dimei H	nsions W	(mm) D	Bar config	Pipe Centres	Output	Output ΔT50°C Watts	Electric element wattage	Stock or made to order
						Δ T50°C	Δ T50°C	element	or made

Flexx is sensual and curvaceous. This handcrafted towel rail is an original design, with all the functionality a fabulous towel rail must have. Manufactured by craftsmen in high quality brass tube, chromed to a mirror finish. Please see pages 137 & 138 for finishes and colour options. Prices shown are chrome finished for all heating and hot water systems.


Please note: Electric and dual energy version comes with a straight bottom bar.





Flexx		nsions	(mm)	Bar	End to End	Output ΔT50°C	Output ΔT50°C	Electric element	Stock or made
BR 30 H	Н	W	D	config	Connections	BTU's	Watts	wattage	to order
CN015	1240	540	250	15	550	2190	642	300	<u>W</u>

PURE Wall Mounted MD037

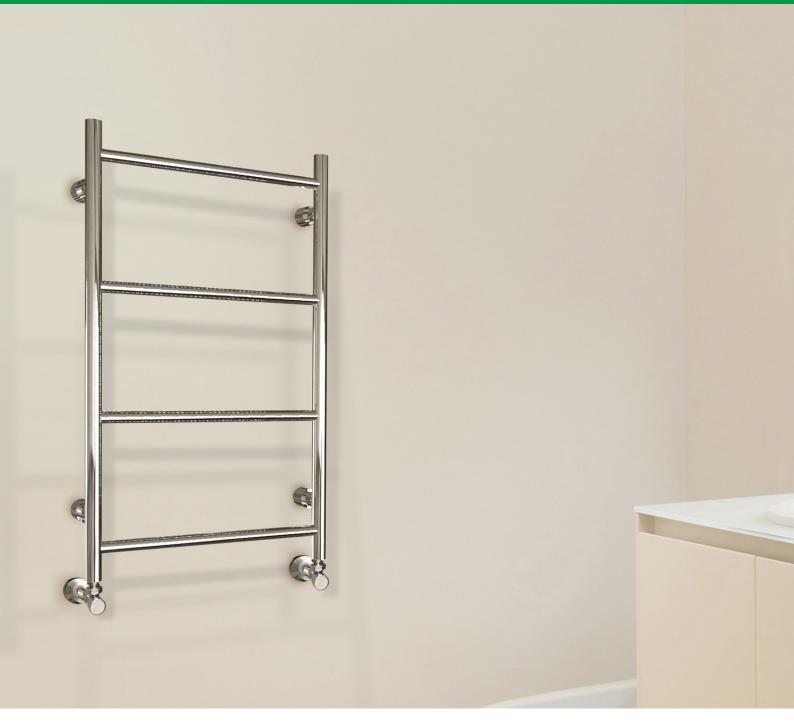

Pure high quality elegance. This handcrafted towel rail is manufactured in brass and chromed to a mirror finish. Bespoke finishes are available at an additional cost. A perfect size for smaller areas where space is at a premium and quality a must. Please see pages 137 & 138 for finishes and colour options. Prices shown are chrome finished for heating and hot water systems.



Pure	Dime	nsions	(mm)	Bar	Pipe Centres	Output Δ T50°C	Output ΔT50°C Watts	Electric element wattage	Stock
BR 30 H	Н	W	D	config	Centres	BTU's			or made to order
MD037	700	425	75	4	400	362	106	75	W

Understated with great towel hanging functionality, Grace is the epitome of simple chic design.

Manufactured from large diameter high quality mild steel. Prices shown are chrome finished for central heating models.







Grace					Pipe	Output	Output	Electric element	Stock
MS 15 C	Н	W	D	config	centres	ΔT50°C BTU's	Δ T50°C Watts	wattage	or made to order
MD067	800	500	100-115	3	462	478	140	125	1
MD067	1200	500	100-115	4	462	678	199	150	/

SMOOTH Wall Mounted CN035



Smooth combines excellent towel hanging space with high heat output and eye catching design.

Manufactured from high quality mild steel. Prices shown are chrome finished for central heating systems models.





Ø 32 + 22mm

Smooth	Dimensions (mm)			Bar	Pipe	Output	Output	Electric	Stock
MS 15 C	Н	W	D	config	centres	ΔT50°C BTU's	Δ T50°C Watts	element wattage	or made to order
CN035	800	400	94-110	9	368	556	163	125	√
CN035	800	500	94-110	9	468	664	189	150	\
CN035	1200	400	94-110	13	368	800	235	200	\checkmark
CN035	1200	500	94-110	13	468	924	271	200	

Smooth II is modern and stylish, featuring 38mm vertical tubes. Manufactured from high quality mild steel with mitred corners. Prices shown are chrome finished for central heating systems.





Smooth II	Dimen	sions (n		Bar config	Pipe centres	Output	Output	Electric element	Stock or made
MS 15 C	Н	W	D	Corning	Centres	BTU's	Watts	wattage	to order
CN036	800	400	96-111	8	368	702	206	125	✓
CN036	800	500	96-111	8	468	810	237	150	/
CN036	1200	400	96-111	11	368	997	292	200	/
CN036	1200	500	96-111	11	468	1144	335	200	1

CHIC Wall Mounted MD046



Chic gives ultimate versatility allowing towels to be accessed from the side. This practical and stylish design is available chrome plated or in white. Manufactured from high quality mild steel which can be mounted to the left or right. Prices shown are chrome or white finished for central heating models.



Stock

or made to order





For electric element & valve options see pages 131 & 135

Chic **Dimensions** Pipe Bar Electric Output Output element wattage config ΔT50°C BTU's Δ T50°C Watts MS 15 C W D 3-3-3-3-3 MD046 1200 500 94 100 150 962 1289 282 377





Manufactured from high quality mild steel, chromed to a mirror finish. Prices

depending on your requirements.

A contemporary, minimalist design with crisp clean lines. Keys II allows towels to be effortlessly hung onto the rails from the left or right hand side,

For electric element & valve options see pages 131 & 135

shown are for central heating models.


Keys II	Dime	Dimensions (mm)		Bar	Pipe	Output	Output	Electric	Stock
MS 15	С	W	D	config	Centres	ΔT50°C BTU's	Δ T50°C Watts	element wattage	or made to order
CN030	1080	500	132.5	6	50	1339	392	150	1
CN030	1460	500	132.5	8	50	1786	524	200	/
CN030	1840	500	132.5	10	50	2237	656	300	/

RUBIK Wall Mounted MD038



Simple and beautiful, the rectangular stainless steel tube is built to last. The Rubik comes in polished stainless steel as standard. Please see pages 137 & 138 for finishes and colour options.

Stainless steel construction suitable for all hot water systems












30sq + 20sq mm

Rubik	Dimer	Dimensions (mm)		Bar	Pipe	Output	Output	Electric	Stock
ss 30 H	Н	W	D	config	Centres	ΔT50°C BTU's	Δ 150°C Watts	element wattage	or made to order
MD038	800	500	80	3-6-3	470	1379	404	200	W
MD038	1200	500	80	4-10-4	470	2072	607	300	W
MD038	1500	500	80	4-7-7-4	470	2549	747	300	W

Modern looks from this square tubed design brings together aesthetics and practicality. This versatile product will suit any modern bathroom. Chromed to a mirrored or anthracite finish. Prices shown are for central heating models.








Squire **Dimensions** Bar Pipe Electric Output Output Stock element wattage config centres Δ T50°C BTU's ΔT50°C Watts or made to order MS 15 Chrome Anthracite D MD047 4-10 W MD047 4-10 MD047 4-8-10 MD047 4-8-10 MD047 4-7-8-10 MD047 4-7-8-10



SERENE Wall Mounted MD049



The Serene is just that. A well balanced design which maximises hanging space. A perfect towel warmer for contemporary kitchens and bathrooms alike. Square tubes finished with a choice of chrome or contemporary finishes. Please see page 137 for other colour options. Prices shown are for central heating models.














Serene MS 15 C	Dim	Dimensions (mm)				Electric element wattage	Output Δ T50°C BTU's		Output Δ T50°C Watts		Stock or made to order
	Н	W	D			wallaye	chrome	painted	chrome	painted	to order
MD049	1000	500	95	12	470	300	876	1396	257	409	√
MD049	1165	500	95	15	470	300	1071	1435	314	420	\checkmark
MD049	1165	600	95	15	570	300	1245	1492	365	437	\checkmark
MD049	1700	500	95	20	470	400	1480	1714	434	501	\checkmark

A contemporary, minimalist design. With crisp edges and clean lines. The Ideal is manufactured in high quality stainless steel which is polished to perfection.

Stainless steel construction is suitable for all hot water systems.







Ideal	Dimensions (mm)		(mm)	Bar Pipe config Centres		Output	Output	Electric	Stock
ss 30 H	Н	W	D	contig	Centres	ΔT50°C BTU's	Δ T50°C Watts	element wattage	or made to order
MD055	900	500	100	6	470	959	281	150	/
MD055	1200	500	100	8	470	1278	375	200	/
MD055	1500	500	100	10	470	1600	469	200	/

BOXA Wall Mounted CN009



Boxa is crafted using large gauge square and rectangular tubing and has smooth rounded corners. A perfect blend of form and function. There are two options, polished stainless steel or chromed mild steel. Available in three heights to suit the size of your room.

Prices shown are for chrome and polished stainless steel models. Please see pages 137 & 138 for finishes and colour options.



Boxa	Dimensions (mm)			Bar config	Pipe centres	Electric	Output ΔT50°C	Output ΔT50°C	Stock or made
MS 15 C	Н	H W D		coring	centres	wattage	BTU's	Watts	to order
CN009A - MS	620	450	120	3	410	75	679	199	\checkmark
CN009B - MS	1060	450	120	5	410	100	989	290	/
CN009C - MS	1500	450	120	7	410	150	1491	437	/
	Dimensions (mm)								
Воха	Dime	nsions	(mm)	Bar	Pipe	Electric	Output	Output	Stock
Boxa SS 30 H	Dimei H	nsions W	(mm)	Bar config	Pipe centres	Electric element wattage	Output Δ T50°C BTU's	Output ΔT50°C Watts	Stock or made to order
000						element	Δ T50°C	Δ T50°C	or made
SS 30 H	Н	W	D	config	centres	element wattage	Δ T50°C BTU's	Δ T50°C Watts	or made to order



Simple and beautiful, this design comes in three different widths, the 500mm shortest width is perfect for areas where space is at a premium. Manufactured from high quality mild steel, chromed to a mirror finish. Prices shown are for central heating models. Please see pages 137 & 138 for finishes and colour options. Prices shown are chrome finished for heating and hot water systems.



Memo	Dimensions (mm)			Bar	End to End	Output	Output Δ T50°C	Electric	Stock or made	
MS 15 C	Н	W	D	config	Connections	BTU's	Watts	wattage	to order	
CN007A	140	500	90	2	500	292	86	75	₩	
CN007B	140	1000	90	2	1000	583	171	100		
CN007C	140	1500	90	2	1500	873	256	125	W	

VISTA Wall Mounted IN002



Vista is sculptural with beautifully finished tactile edges. Manufactured from stainless steel and has a brushed or polished finish. Available in three lengths from 500mm, ideal for ensuites to 1500mm, perfect above a bath. Stainless steel suitable for all hot water systems. Please see page 137 for colour options.











Vista	Dime	nsions	(mm)	Bar	End to End	Output	Output	Electric	Stock or made
SS 30 H	Н	W	D	config	Connections	BTU's	Watts	wattage	to order
IN002A	140	500	93	2	500	403	118	75	W
IN002B	140	1000	93	2	1000	761	223	100	W
IN002C	140	1500	93	2	1500	1120	328	125	W



Zenith is manufactured in stainless steel and has a brushed or polished finish, suitable for all heating & hot water systems. Please see page 137 for colour options

Two contemporary designed towel rails, perfect for modern bathrooms.



Moda is manufactured from high quality mild steel and finished in polished chrome with a white integral radiator. Other finishes are available please see pages 137 & 138.






Zenith	Dimensions (mm)			Bar config	Pipe centres	Electric	Output	Output ΔT50°C	Stock or made	
SS 30 H	Н	W	D			wattage	BTU's	Watts	to order	
IN007	1200	400	90	6	360	125	1437	421	W	
Moda	Dime	nsions	(mm)	Bar	Pipe	Electric	Output	Output	Stock	
MS 15 C	Н	W	D	config	centres	element wattage	ΔT50°C BTU's	Δ T50°C Watts	or made to order	
CN001	1200	500	150	5	310	300	2686	787	2	

QUADRATE Wall Mounted MD074



Quadrate has 50mm vertical tubes and crisp, sleek edges, which would suit any modern bathroom setting. Available in a range of heights and widths. Manufactured from high quality mild steel. Prices are for chrome central heating models.












Quadrate	Dimer	Dimensions (mm)			Pipe	Output	Output	Electric	Stock or made	
MS 15 C	Н	W	D	config	centres	ΔT50°C BTU's	Δ T50°C Watts	element wattage	or made to order	
MD074	800	500	95 - 110	3-3-3	450	923	271	150	1	
MD074	800	600	95 - 110	3-3-3	550	1058	310	200	/	
MD074	1200	500	95 - 110	3-4-7	450	1419	416	300	/	
MD074	1200	600	95 - 110	3-4-7	550	1629	477	300	/	
MD074	1600	500	95 - 110	3-3-3- 5-5	450	1914	561	400	1	
MD074	1600	600	95 - 110	3-3-3- 5-5	550	2199	645	400	\checkmark	

Arc has it all, ample towel hanging space and good heat output. Co-ordinate your bathroom or kitchen with a choice of Black, White or Chrome finishes. Manufactured from high quality mild steel. Prices shown are for central heating models.



Unique bar design



828mm 10 cross bars

1200mm 15 cross bars


1800mm 21 cross bars





Arc			Bar Pipe config centres			Output Δ T50°C BTU's		Output Δ T50°C Watts		Stock or made	
MS 15 C	Н	W	D			wattage	Chrome	B & W	Chrome	B & W	to order
MD065	828	500	133 - 150	3-3-4	430	200	793	1196	232	350	1
MD065	1200	500	133 - 150	3-4-4-4	430	300	1179	1778	346	521	1
MD065	1800	500	133 - 150	3-3-3- 4-4-4	430	400	1674	2524	491	740	1

AQUILA Wall Mounted DR016

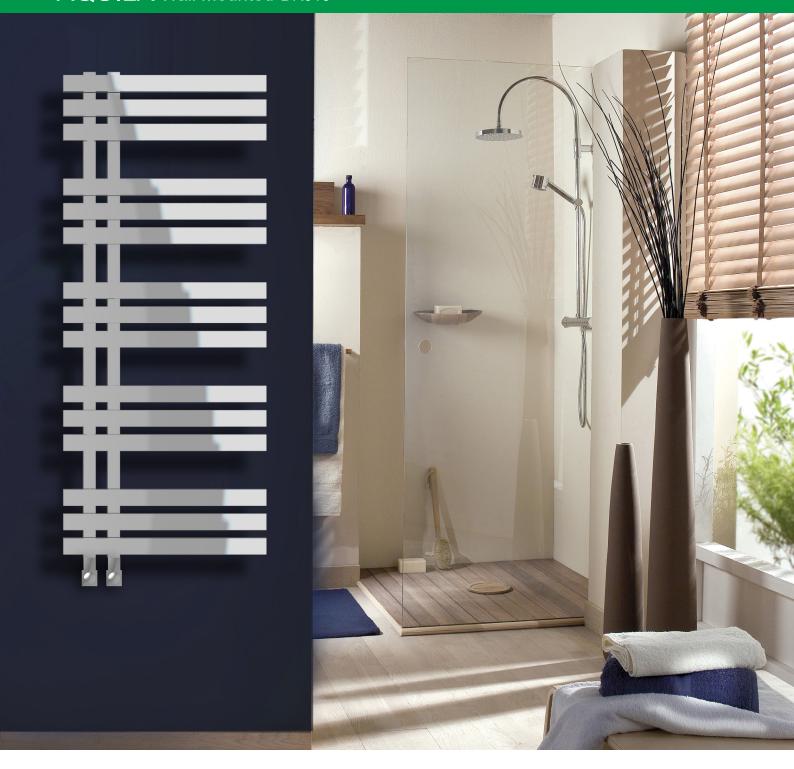

Rectangular tube towel rail provides ample space and heat for warming or drying towels, in a design which allows you to slide them effortlessly into place from either the left or right, depending on your preference.

Manufactured from high quality mild steel, prices shown are chrome finished for central heating models.




D

(

E

40 x 10 + 30 x 30mm

Aquila	Dimer	nsions	(mm)	Bar	Pipe	Output	Output	Electric	Stock
MS 15 C	Н	W	D	config	centres	ΔT50°C BTU's	Δ T50°C Watts	element wattage	or made to order
DR016	1200	500	118	3-3-3- 3-3	60	1209	354	150	√
DR016	1400	600	118	3-3-3-3- 3-3	60	1488	436	200	/

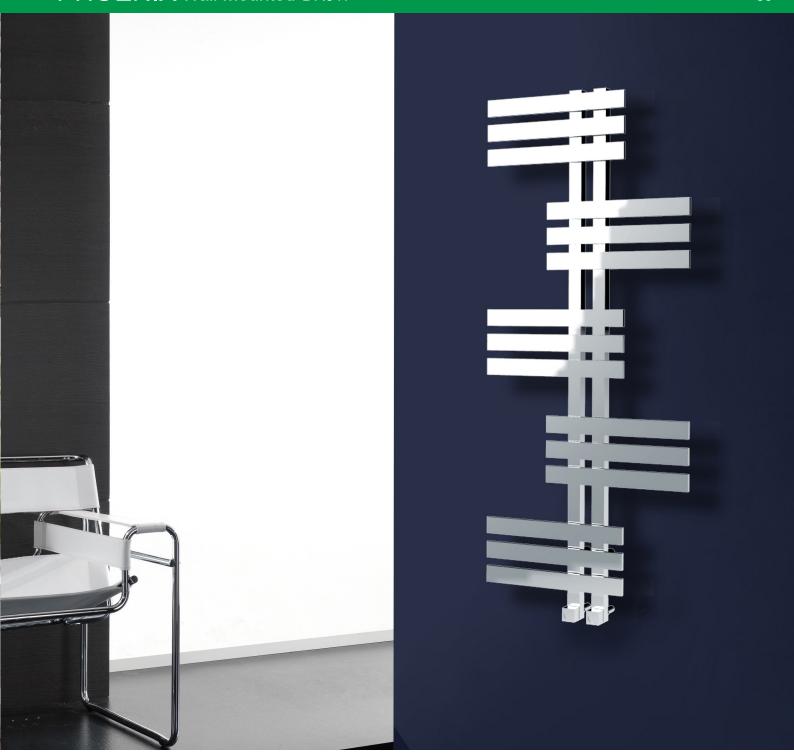

Asymmetric rectangular tube towel rails give a fascinating design that has clean lines and simple access from either side. Manufactured from high quality mild steel, prices shown are chrome finished for central heating models.




Phoenix	Dime	nsions	(mm)	Bar	Pipe centres	Output ΔT50°C	Output ∆⊤50°C	Electric	Stock
MS 15 C	Н	W	D	config	centres	BTU's	Watts	element wattage	or made to order
DR017	1200	500	118	3-3-3- 3-3	60	1029	301	150	1

GALLANT Wall Mounted MD040SS



Crafted in high quality stainless steel. The Gallant is a bold stylish piece offering crisp right angles to stunning effect. Available in two heights in polished stainless steel, suitable for all hot water systems.

Please see page 137 for colour options.



1200mm 11 cross bars 900mm 8 cross bars









30sq + 40 x 20sq mm

Gallant	Dimensions (mm)		Bar	Pipe	Output	Output	Electric	Stock		
ss 30 H	Н	W	D	config	Centres	ΔT50°C BTU's	ΔT50°C Watts	element wattage	or made to order	
MD040SS	900	500	97	2-2-4	440	1564	458	200	W	
MD040SS	1200	500	97	2-2-3-4	440	2131	624	300	W	

The square tubed design brings together aesthetics and practicality. This versatile product will suit any modern bathroom. Chromed to a mirrored finish. Prices shown are for central heating models.





0 1	Dime		(100.100)	Desir	Di	0.11	Ondon		Stock	
Gallant II	Dime	ensions	s (mm)	Bar config	Pipe Centres	Output	Output Δ T50°C	Electric element	Stock or made	
MS 15 C	Н	W	D	cornig	Conacc	BTU's	Watts	wattage	to order	
MD040MS	970	500	130-155	3-4-5	450	1011	296	200	√	
MD040MS	1270	500	130-155	3-5-7	450	1239	363	300	1	


VELA Wall Mounted MD048



Rectangular crossbars give a solid feel to this design. Available in two sizes finished in your choice of chrome, white or a contemporary colour of your choice from the swatches (right). Prices shown are for central heating models. Please see pages 137 for colour options.



For electric element & valve options see pages 131 & 135



9 cross bars



Vela MS 15 C	Dimensions (mm)			Bar config	Pipe centres	Electric	Output		Output Δ T50°C Watts		Stock or made
	Н	W	D			wattage	chrome	painted	chrome	painted	to order
MD048	950	500	103	2-3-4	462	150	839	986	246	289	1
MD048	1300	500	103	3-5-5	462	300	1125	1327	330	389	

Venture is available in three widths and four heights, with spacious hanging bars. The bold jointed design suits contemporary interiors. Manufactured from high quality brass, chromed to a mirror finish. Please see pages 137 & 138 for finishes and colour options.













	Venture BR 30 H	Dimensions (mm)			Bar	Pipe	Output	Output	Electric	Stock
		Н	W	D	config	Centres	ΔT50°C BTU's	ΔT50°C Watts	Element Wattage	or made to order
	CN022	750	450	95	4	400	413	121	75	√
	CN022	850	650	95	4	600	536	157	100	W
	CN022	1300	500	95	6	450	703	206	125	W
	CN022	1300	650	95	6	600	819	240	125	W
	CN022	1600	500	95	8	450	911	267	150	W
	CN022	1600	650	95	8	600	1064	312	150	W

VIVID Wall Mounted CN021



Vivid is a beautiful minimalistic towel warmer, manufactured from high quality brass. Prices shown are for chrome heating and hot water systems. Please see pages 137 & 138 for other finish and colour options.



Mitred Joint









25.4 + 22mm

Vivid		Dimensions (mm)			Bar	Pipe	Output	Output	Electric	Stock	
	BR 30 H	Н	W	D	config	Centres	ΔT50°C BTU's	ΔT50°C Watts	Element Wattage	or made to order	
	CN021	750	450	93	4	400	413	121	75	/	
	CN021	800	650	93	4	600	525	154	100		
	CN021	1250	500	93	6	450	686	201	125	/	
	CN021	1250	650	93	6	600	802	235	125		
	CN021	1550	500	93	8	450	880	258	150	W	
	CN021	1550	650	93	8	600	1034	303	150	W	



Standard installation with visable valve.



Integral valve is hidden within the towel rail.

INTEGRAL COLLECTION VALVE FITTING





Vivid IV has all the stunning looks of Vivid with the added feature of built in integral valves. Manufactured from high quality brass with a chrome mirror finish. Prices shown are for chrome heating and hot water systems. This radiator is also available on page 35 with standard valves. Please see pages 137 & 138 for other finish and colour options. Pipe work is hidden in a brick or studded wall. Supplied with service valves.





VIVID IV Wall Mounted IVCN021




Vivid IV 400 x 1200 is the ideal choice over a bath or underneath a window. The single bar versions are perfect for en-suites and small spaces. Manufactured from high quality brass with built in valves. Prices shown are chrome finished for all heating and hot water systems. Please see pages 137 & 138 for other finish and colour options. Pipe work is hidden in a brick or studded wall. Supplied with service valves.












Integral valve is hidden within the towel rail.

INTEGRAL COLLECTION VALVE FITTING



Vivid IV	Dime	nsions	(mm)	Bar	Pipe	Output	Output	Stock
BR 30 H	Н	W	D	config	centres	ΔT50°C BTU's	Δ T50°C Watts	or made to order
IVCN021	400	1200	94	3	1150	624	183	W
IVCN021 single bar	50	400	94	1	325	72	21	W
IVCN021 single bar	50	600	94	1	525	102	30	W






Simple and beautiful, this design manufactured from high quality brass, is perfect at the side of a shower. Prices shown are chrome finished for all heating and hot water systems. Please see pages 137 & 138 for other finish and colour options. Pipe work is hidden in a brick or studded wall. Supplied with service valves.



Robe or Towel Hook

INTEGRAL COLLECTION VALVE FITTING








Simplicity IV	Dimer			Pipe	Output	Output	Stock	
BR 30 H	Н	W	D	config	centres	ΔT50°C BTU's	ΔT50°C Watts	or made to order
IVCN026	1700	50	115	1	1625	256	75	<u> </u>

CURVEE Wall Mounted MD050



Curvee is stylish and practical. As the name suggests the cross rails are gently bowed. The towel rail offers good heat output in four sizes, the 800mm version is pictured. Available in chrome or white finish. Please see page 137 for colour options. Prices shown are chrome finished for central heating models.





Curvee	Dimensions (mm)			Bar config	Pipe centres	Electric		Output		put C Watts	Stock or made to order
MS 15 C	Н	W	D			wattage	chrome	painted	chrome	painted	to order
MD050	800	500	135-160	4-11	455	150	802	1856	235	543	✓
MD050	800	600	135-160	4-11	555	200	934	1901	274	556	/
MD050	1100	500	135-160	4-6-10	455	200	1078	1992	316	583	\checkmark
MD050	1100	600	135-160	4-6-10	555	300	1289	2005	387	587	√



The Solo and Binary are perfect for situations where space is at a premium and style is of priority. This clever design allows you to stack, roll or hang your towels, so they are always warm, dry and handy. Manufactured from quality brass and chromed to a mirror finish. Bespoke finishes are available at an additional cost. Please see page 137 for colour options. Prices shown are chrome finished for central heating models.





VL003 25.4mm
For electric element & valve options see pages 131 & 135

Solo and Binary	Dime	nsions	(mm)	Bar	Pipe	Output	Output	Electric	Stock
BR 30 H	Н	W	D	config	Centres	ΔT50°C BTU's	Δ T50°C Watts	element wattage	or made to order
TR001	263	500	315	5	425	430	126	50	W
TR002	275	500	315	9	425	764	224	75	

CARINA Wall Mounted MD051



Carina offers curves that work perfectly with the bold tubular design. The towel rail maximises storage space with a top shelf. Finished in chrome or white to match your sanitaryware. Style and versatility for the most contemporary of settings. Manufactured from high quality mild steel. Please see page 137 for colour options. Prices shown are chrome finished for central heating models.










Carina	Din	Dimensions (mm)		Bar config	Face to Face	Electric element	Out ∆⊤50°C		Output Δ T50°C Watts		Stock or made to order
MS 15 C	Н	W	D		connections	wattage	chrome	white	chrome	white	lo order
MD051	1200	500	225	8	422	150	762	1158	223	339	✓
MD051	1200	600	225	8	522	150	831	1262	243	370	✓

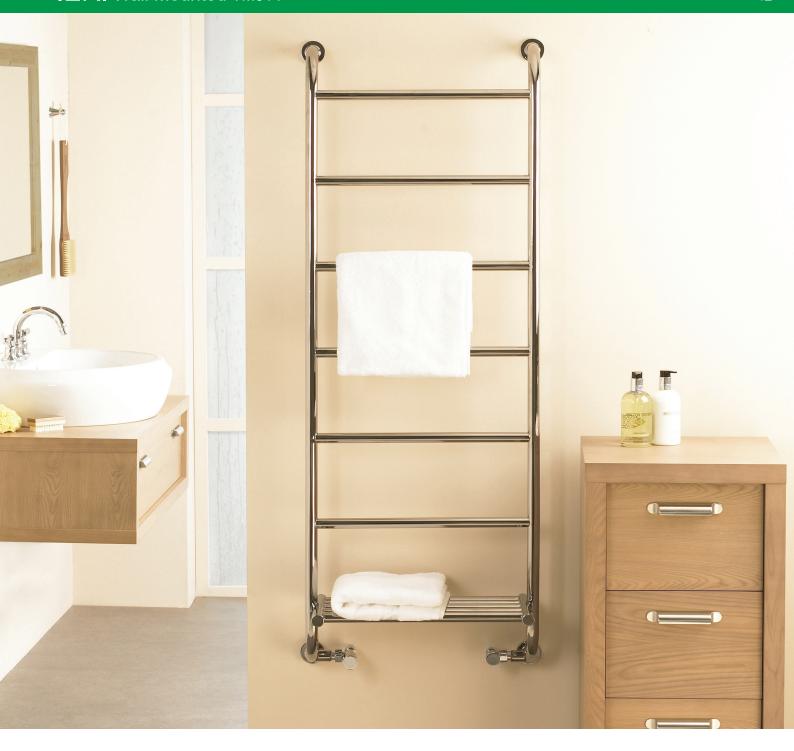



The integrated shelf in this curvaceous design has the added benefit of towel stacking as well as plentiful hanging space. Available in two height options to suit your space with an alternative shelf position which is optional on point of order. Manufactured from high quality brass and chrome finished with bespoke finishes available at an additional cost. Please see pages 137 & 138 for finishes and colour options. Prices shown are chrome finished for central heating models.

leri	Dime	nsions	(mm)	Bar config	Face to Face	Output	Output	Electric	Stock or made
BR 30 H	Н	W	D	comig	connections	BTU's	Watts	wattage	to order
TM014	750	500	265	4	375	747	219	100	W
TM014	1350	500	265	7	375	1122	329	200	

STENDY QUAD Wall Mounted



Stendy Quad is manufactured from 20mm and 30mm square mild steel tubes finished in polished chrome or white to match your sanitaryware. Style and versatility for the most contemporary of setting. Available in two heights, both will provide you with plenty of warm dry towels. Prices shown are for central heating models.



Stendy Quad	Dii	mensic	ons	Bar config	Pipe centres	Out ۲50°C	put BTU's	Out ∆⊤50°0		Stock or made
MS 15 C	Н	W	D			chrome	white	chrome	white	to order
SR090048	905	480	90-356	18	450	1249	1709	366	501	W
SR130048	1305	480	90-356	25	450	1873	2569	549	753	W





Stendy has a softer mix of large 41mm gauge D shape tubes and smaller round hanging bars. It provides seriously stylish storage, shelving and hanging space in three different heights and two widths. Available in polished chrome or white. Mild Steel manufactured framework. Prices shown are for central heating models.



VL003 $23 + 35 \times 41$ mm D Section For electric valve options see pages 135

Stendy		nensio (mm)	ns	Bar config	Pipe centres	Out		Out _l		Stock or made
MS 15 C	Н	W	D			chrome	white	chrome	white	to order
SY0889512	889	512	98-337	16	465	1003	1388	294	407	₩
SY0889612	889	612	98-337	16	565	1214	1678	356	492	W
SY1318512	1318	512	98-337	22	465	1774	2429	520	712	W
SY1318612	1318	612	98-337	22	565	2146	2941	629	862	W
SY1747512	1747	512	98-337	30	465	2398	3285	703	963	W
SY1747612	1747	612	98-337	30	565	2903	3974	851	1165	W

COMBY Wall Mounted MD052






Comby is designed to provide completely adaptable towel hanging and storage space. Towels in use can be hung over the cross rails to dry, clean towels placed on the folding shelf. Clothes can also be aired from the shelf as pictured. Chromed to a mirror or white painted finish. Prices shown are for central heating models.


Comby MS 15 C	Din	nensio	ons	Bar config	Pipe centres	Electric element wattage		t put C BTU's	Output Δ T50°C Watts		Stock or made to order	
MS 15 C	Н	W	D		wa	wallage	chrome	painted	chrome	painted	Chrome	White
MD052	929	500	80	18	450	150	1081	1613	317	473	W	✓
MD052	1209	500	80	25	450	300	1392	2077	408	609		1
MD052	1454	500	80	32	450	400	1668	2490	489	730	W	/
MD052	1769	500	80	41	450	600	2036	3040	597	891	W	1

A perfect combination for heating and drying. This versatile product will suit any modern bathroom. With a white double panelled radiator as standard and 25mm chrome horizontal tubes.

Other radiator colours can be specified please see page 137 for colour options. Prices shown are for central heating models.









1200 x 600mm 10 Sections



1500 x 500mm 7 Sections



1500 x 600mm 10 Sections

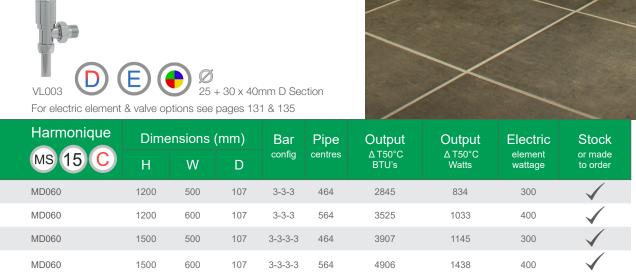



NEXUS III Wall Mounted TM001




High heat output from a radiator combined with a stylish brass frame makes the perfect combination of heat, good looks and versatility to enhance any bathroom or utility room. Prices shown are for central heating models. The radiator inset comes in white as standard. Please see pages 137 & 138 for finishes and colour options.







Nexus III	Dime	nsions	(mm)	Bar	Pipe	Output	Output	Electric	Stock
BR 30 C	C H W D	coning	Centres	ΔT50°C BTU's	Δ T50°C Watts	element wattage	or made to order		
TM001	900	525	142	6	500	2443	716	400	1

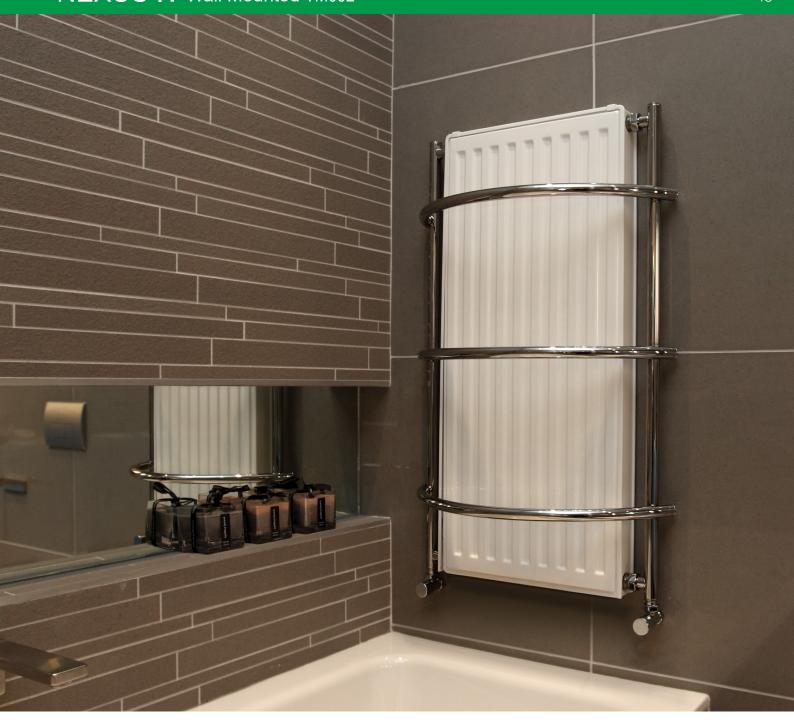

The contemporary version of the Nexus Grand (Page 90) is manufactured in brass framework and chrome finished. The radiator inset comes in white as standard, other colours can be specified at an additional cost. Please see pages 137 & 138 for finishes and colour options. Prices shown are for central heating models.



Nexus IV	Dime	nsions	(mm)	Bar	Pipe	Output	Output	Electric	Stock
BR 30 C	Н	W	D	config	Centres	ΔT50°C BTU's	Δ T50°C Watts	element wattage	or made to order
TM002	900	590	214	3	500	2351	689	400	√



be fident

V®GUE

Ladder Rails

The Ladder style towel rail... High heat output and towel hanging space in an efficient format.

Vogue UK have an extensive offering for this benchmark range of products.

Clean designs to suit modern bathrooms...



AXIS 22mm Wall Mounted MD062




Axis and Combes have 22mm horizontal tubes. Axis has straight rails and Combes has curved. Prices shown are for central heating models.

Optional Aroma Plug




Blanking Plug with Aroma Oil Dish AC035


New Metallic Finishes



Straight Bars




Axis (Straight)	Dimensions (mm)		Bar	Pipe	Output	Output	Electric	Stock	
MS 15 C	Н	W	D		Centres			element wattage	or made to order
MD062	800	400	83 - 105	4-5-5	355	711	209	125	√
MD062	800	500	83 - 105	4-5-5	455	858	252	150	√
MD062	800	600	83 - 105	4-5-5	555	1005	295	150	/
MD062	1000	300	83 - 105	4-5-8	255	695	204	150	√
MD062	1000	400	83 - 105	4-5-8	355	874	256	150	/
MD062	1000	500	83 - 105	4-5-8	455	1053	308	200	/
MD062	1000	600	83 - 105	4-5-8	555	1231	361	200	/
MD062	1200	400	83 - 105	4-5-12	355	1070	313	200	✓
MD062	1200	500	83 - 105	4-5-12	455	1291	378	200	\checkmark
MD062	1200	600	83 - 105	4-5-12	555	1512	443	300	/
MD062	1400	500	83 - 105	4-5-5-10	455	1470	431	300	\checkmark
MD062	1400	600	83 - 105	4-5-5-10	555	1721	504	300	√
MD062	1600	500	83 - 105	4-5-5-9	455	1689	495	300	/
MD062	1600	600	83 - 105	4-5-5-9	555	1979	580	400	/
MD062	1800	500	83 - 105	4-5-5-5- 13	455	1903	558	400	/
MD062	1800	600	83 - 105	4-5-5-5- 13	555	2232	654	400	/



 1800mm
 1600mm
 1400mm

 32 cross bars
 28 cross bars
 24 cross bars



1200mm 1000mm 800mm 21 cross bars 17 cross bars 14 cross bars







				config	Centres				or made
MS 15 C	Н	W			Centres			wattage	to order
MD063	800	500	128 - 150	4-5-5	455	858	252	150	✓
MD063	800	600	128 - 150	4-5-5	555	1005	295	150	\checkmark
MD063	1000	500	128 - 150	4-5-8	455	1053	308	200	\checkmark
MD063	1000	600	128 - 150	4-5-8	555	1231	361	200	\checkmark
MD063	1200	500	128 - 150	4-5-12	455	1291	378	200	\checkmark
MD063	1200	600	128 - 150	4-5-12	555	1512	443	300	\checkmark
MD063	1400	500	128 - 150	4-5-5-10	455	1470	431	300	\checkmark
MD063	1400	600	128 - 150	4-5-5-10	555	1721	504	300	\checkmark
MD063	1600	500	128 - 150	4-5-5-9	455	1689	495	300	\checkmark
MD063	1600	600	128 - 150	4-5-5-9	555	1979	580	400	\checkmark
MD063	1800	500	128 - 150	4-5-5-5- 13	455	1903	558	400	\checkmark
MD063	1800	600	128 - 150	4-5-5-5- 13	555	2232	654	400	\checkmark

FOCUS 25mm Wall Mounted MD001




The Focus is a range of 25mm horizontal tube design towel rails. Giving high heat output and superior looks. Manufactured from high quality mild steel with smooth flat tops and rear air vent. Prices shown are for chrome and white central heating models.

Available in other contemporary colours please see page 55. For other RAL colour options please see page 137.

New Metallic Finishes







Focus			Bar config	Pipe centres	Electric element	Output ΔT50°C BTU's		Output Δ T50°C Watts		Stock or made	
MS 15 C	Н	W	D			wattage	chrome	white	chrome	white	to order
MD001	800	300	93-113	3-5-6	255	100	604	923	177	271	/
MD001	800	400	93-113	3-5-6	355	125	771	1179	226	346	\checkmark
MD001	800	500	93-113	3-5-6	455	150	938	1434	275	420	\checkmark
MD001	800	600	93-113	3-5-6	555	200	1105	1689	324	495	✓
MD001	1000	500	93-113	4-5-9	455	300	1198	-	351	-	✓
MD001	1000	600	93-113	4-5-9	555	400	1413	-	414	-	\
MD001	1200	300	93-113	4-5-13	255	200	932	1444	273	424	\checkmark
MD001	1200	400	93-113	4-5-13	355	300	1196	1853	350	543	\
MD001	1200	500	93-113	4-5-13	455	300	1460	2261	428	663	\checkmark
MD001	1200	600	93-113	4-5-13	555	400	1723	2669	505	783	
MD001	1500	500	93-113	4-5-7- 12	455	300	1823	2796	534	820	\checkmark
MD001	1500	600	93-113	4-5-7- 12	555	400	2154	3304	631	969	\checkmark
MD001	1800	400	93-113	4-5-12- 13	355	600	1779	2703	521	793	\checkmark
MD001	1800	500	93-113	4-5-12- 13	455	600	2176	3305	638	969	\checkmark
MD001	1800	600	93-113	4-5-12- 13	555	600	2572	3908	754	1146	\checkmark

The curved version of the Focus. The Chorus has all the same attributes with high heat output and superb looks. Prices shown are for chrome or white central heating models. Please see page 137 for other colour options.








MS 15 C MD002 100-120 3-5-6 MD002 105-125 3-5-6 MD002 100-120 4-5-9 MD002 105-125 4-5-9 MD002 100-120 4-5-13 MD002 105-125 4-5-13 MD002 100-120 MD002 105-125 100-120 4-5-12-MD002 105-125 4-5-12-MD002

FOCUS COLOURS 25mm Wall Mounted MD001

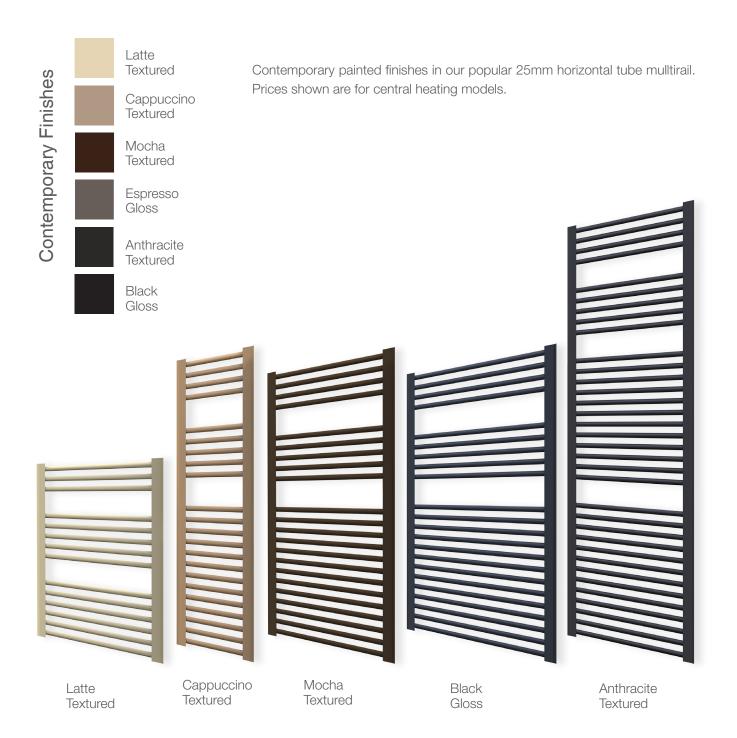




Focus Colours	Dime	ensions (mm)	Bar	Pipe	Output	Output	Electric element	Stock or made
MS 15 C		W		config			Watts		to order
MD001	800	500	93 - 113	3-5-6	455	1434	420	150	✓
MD001	1200	300	93 - 113	4-5-13	255	1444	424	200	\
MD001	1200	500	93 - 113	4-5-13	455	2261	663	300	1
MD001	1200	600	93 - 113	4-5-13	555	2669	783	400	\checkmark
MD001	1800	500	93 - 113	4-5-12-13	455	3305	969	600	\checkmark



CHUBE Wall Mounted MD035



The round tube polished stainless steel design with rear air vent, brings together aesthetics and practicality. It will suit any modern bathroom. Please see page 137 for colour options. Stainless Steel suitable for all hot water systems.










() 31.8 + 22m

Chube	Dimensions (mm)		Bar	Pipe	Output	Output	Electric	Stock	
SS 30 H	Н	W	D	config				element wattage	
MD035	800	300	100	3-4-5	268	549	161	125	/
MD035	800	400	100	3-4-5	368	672	197	150	\checkmark
MD035	800	500	100	3-4-5	468	829	243	200	1
MD035	800	600	100	3-4-5	568	918	269	200	/
MD035	1200	300	100	3-4-5-6	268	819	240	150	/
MD035	1200	400	100	3-4-5-6	368	1003	294	200	/
MD035	1200	500	100	3-4-5-6	468	1187	348	200	/
MD035	1200	600	100	3-4-5-6	568	1372	402	300	/
MD035	1600	300	100	3-4-5- 6-6	268	1095	321	200	1
MD035	1600	400	100	3-4-5- 6-6	368	1334	391	200	/
MD035	1600	500	100	3-4-5- 6-6	468	1583	464	300	/
MD035	1600	600	100	3-4-5- 6-6	568	1829	536	300	\checkmark

Kerve is the curvaceous sibling of the Chube. As the name suggests the hanging bars have a gentle tactile bow. The design has an integral rear air vent for aesthetic appeal and ease of installation. Available in a wide range of heights and widths. Polished stainless steel manufacture, suitable for all hot water systems. Please see page 137 for colour options.








Kerve	Dimensions (mm)			Bar	Pipe	Output	Output	Electric	Stock
SS 30 H	Н	W		config					
MD036	800	500	120	3-4-5	468	829	243	200	√
MD036	800	600	120	3-4-5	568	918	269	200	\checkmark
MD036	1200	500	120	3-4-5-6	468	1187	348	200	/
MD036	1200	600	120	3-4-5-6	568	1372	402	300	/
MD036	1600	500	120	3-4-5- 6-6	468	1583	464	300	/
MD036	1600	600	120	3-4-5- 6-6	568	1829	536	300	/

GALAXY Wall Mounted MD059

Galaxy has clean lines and plenty of hanging space. Manufactured from polished stainless steel. Please see page 137 for colour options. Suitable for all hot water systems.














Ø 31.8 + 22mm

Galaxy	Dimensions (mm		(mm)	Bar	Pipe	Output	Output	Electric element	Stock or made
SS 30 H	Н	W	D	config	Centres	BTU's		wattage	to order
MD059	700	500	100	3	468	294	86	75	/
MD059	1200	500	100	5	468	740	217	125	/
MD059	1600	500	100	7	468	1011	296	200	\checkmark

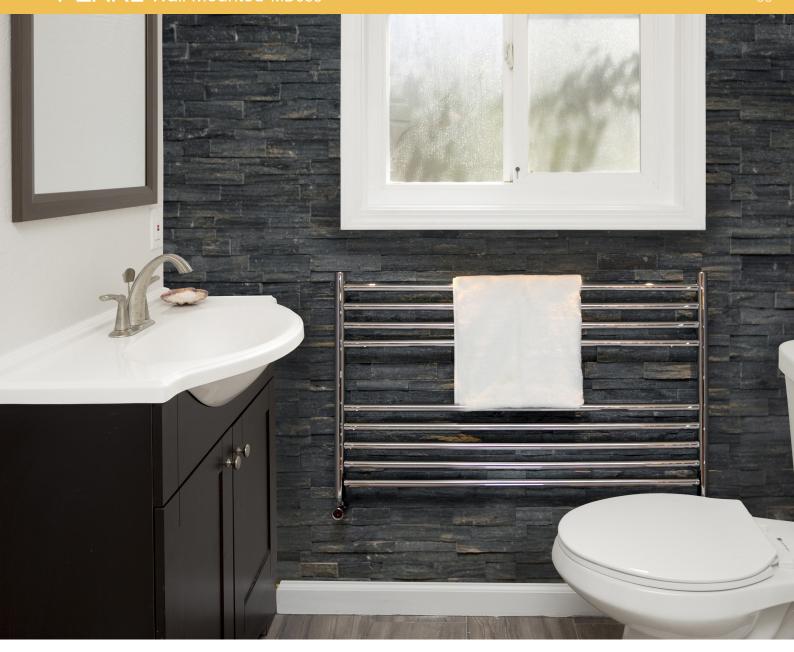

High quality polished stainless steel. Pearl's chic styling and sensible design allows you to hang towels side by side. Suitable for all hot water systems. Please see page 137 for colour options.





Pearl	Dime	nsions	(mm)	Bar config	Pipe Centres	Output	Output	Electric element	Stock or made
SS 30 H	Н	W	D					wattage	to order
MD058	600	750	100	4-5	718	1430	419	100	√
MD058	600	1000	100	4-5	968	1765	517	125	\
MD058	800	750	100	3-4-5	718	1805	529	200	\checkmark
MD058	800	1000	100	3-4-5	968	2327	682	200	/

TUNE Wall Mounted MD003



Contemporary style, these multirails work well with most interior design schemes. Tune has straight cross rails and Melody's have a gentle curve. Both are exceptionally practical and work well in bathrooms and kitchens alike. Prices shown are chrome finished for central heating models.


Optional Aroma Plug




Blanking Plug with Aroma Oil Dish AC035




772mm 13 Cross Bars



1186mm 20 Cross Bars



1508mm 25 Cross Bars



1738mm 30 Cross Bars







Ø 35 + 23mm

Tune (Straight)	Dime	Pimensions (mm)		Bar	Pipe	Output	Output	Electric	Stock	
MS 15 C	Н	W	D	config		ΔT50°C BTU's		element wattage	or made to order	
MD003	772	500	76 - 99	3-5-5	450	988	290	200	✓	
MD003	772	600	76 - 99	3-5-5	550	1185	347	200	/	
MD003	1186	500	76 - 99	5-5-5-5	450	1586	465	400	/	
MD003	1186	600	76 - 99	5-5-5-5	550	1886	553	400	/	
MD003	1508	500	76 - 99	5-5-5- 5-5	450	1982	581	400	/	
MD003	1508	600	76 - 99	5-5-5- 5-5	550	2339	686	400	/	
MD003	1738	500	76 - 99	6-6-6- 6-6	450	2342	686	600	/	
MD003	1738	600	76 - 99	6-6-6- 6-6	550	2781	815	600	✓	






Melody (Curved)	Dime	ensions (ı	mm)	Bar	Pipe	Output	Output	Electric	Stock
MS 15 C	Н	W		config				element wattage	or made to order
MD004	772	500	76 - 99	3-5-5	450	988	290	200	1
MD004	772	600	76 - 99	3-5-5	550	1185	347	200	/
MD004	1186	500	76 - 99	5-5-5-5	450	1586	465	400	/
MD004	1186	600	76 - 99	5-5-5-5	550	1886	553	400	/
MD004	1508	500	76 - 99	5-5-5- 5-5	450	1982	581	400	/
MD004	1508	600	76 - 99	5-5-5- 5-5	550	2339	686	400	/
MD004	1738	500	76 - 99	6-6-6- 6-6	450	2342	686	600	/
MD004	1738	600	76 - 99	6-6-6- 6-6	550	2781	815	600	/


STELLA Wall Mounted MD034



Contemporary styling always makes an impact. Stella is manufactured from polished stainless steel. Please see page 137 for colour options. Suitable for all hot water systems.







800mm 15 cross bars











Stella	Dimer	nsions	(mm)	Bar	Pipe	Output	Output	Electric	Stock
SS 30 H	Н	W	D						or made to order
MD034	800	450	100	3-4-8	400	1405	412	100	√
MD034	800	600	100	3-4-8	550	1758	515	150	\checkmark
MD034	1200	450	100	4-8-10	400	2074	608	150	\checkmark
MD034	1200	600	100	4-8-10	550	2589	759	200	\




Simple style, with bold straight cross rails. Manufactured from a high quality brass and chromed to a mirror finish.

Supplied with a hidden rear air vent for aesthetic appeal and ease of installation. Available in three different heights. If you need a different size, talk to us about our bespoke service. Prices shown are for all hot water and heating systems.

Please see pages 137 & 138 for finishes and colour options.



Rear air vent
Capped off smooth ends for
aesthetic appeal and ease of
installation.







1435mm 30 Cross Bars

1000mm 21 Cross Bars

720mm 14 Cross Bars








Ø 31.8 + 25.4mn

Studio	Dimensions (mm)			Bar	Pipe	Output	Output	Electric	Stock	
BR 30 H	Н	W	D		Centres		Δ T50°C Watts	element wattage		
MD006	720	500	82 - 102	4-4-6	468	1116	327	200	1	
MD006	1000	500	82 - 102	6-7-8	468	1645	482	300	/	
MD006	1435	500	82 - 102	6-8-8-8	468	2355	690	400	1	

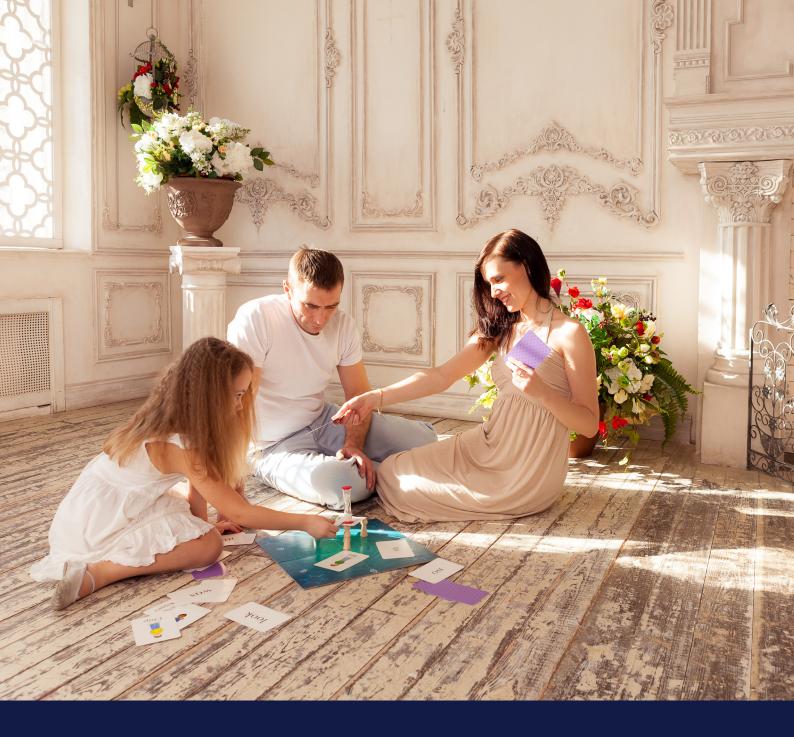

be elegant

V@GUETraditional Towel Rails

A collection of traditional towel rails. Designed and handcrafted by Vogue UK, reflecting our commitment to providing the finest interior pieces.

High quality materials and finishes with our guarantee to stand the test of time.



REGENCY Floor and Wall Mounted LG004 / OG006

















For electric element & valve options see pages 131 & 135 LG Ball Joint




OG Ball Joint

The classic column radiator towel rail, offering high heat output. Brass or mild steel manufactured framework with an integral white mild steel column radiator. Prices shown are chrome finished for central heating models. Please see pages 137 & 138 for finishes and colour options.

Regency	Dimensions (mm)		Bar config	Face to Face	Output	Output	Electric	Stock or made	
MS 15 C	Н	W	D	coring	connections	BTU's	Watts	wattage	to order
LG004-MS	965	540	230	1	395	1337	392	200	/
LG004-MS	965	673	230	1	528	1890	554	400	
LG004-MS	965	765	230	1	620	2228	653	400	\checkmark

Regency BR 30 C	Dime			Electric					
	Н	W	D	coning	connections	BTU's	Watts	wattage	to order
LG004C-BR	938	500	250	1	343	1337	392	200	W
LG004B-BR	938	675	250	1	518	1890	554	400	W
LG004A-BR	938	735	250	1	578	2228	653	400	W
OG006C-BR	938	500	250	1	343	1337	392	200	
OG006B-BR	938	675	250	1	518	1890	554	400	W
OG006A-BR	938	735	250	1	578	2228	653	400	

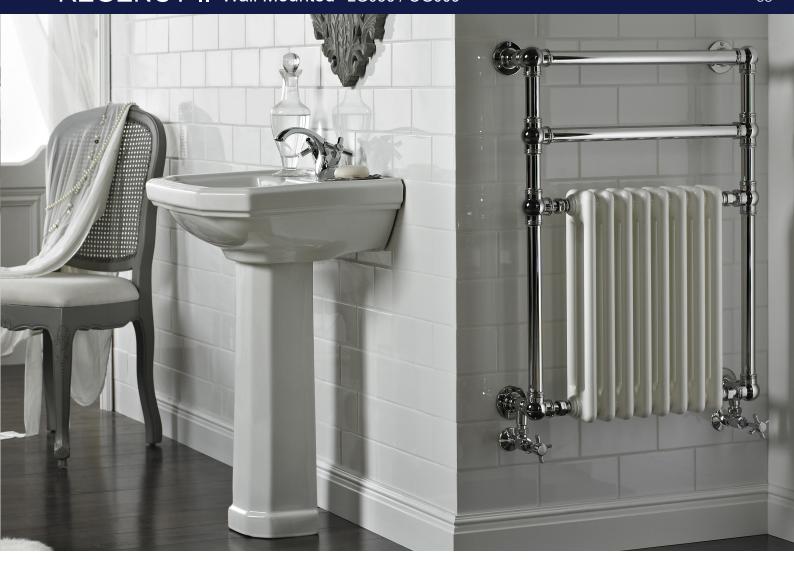

The Regency II Wall Mounted emanates traditional style. This handmade British design will stand the test of time! A Vogue UK registered design, liked for its heat output, hanging space and unique design. Brass manufactured framework with an integral white mild steel column radiator. Your choice of Legacy or Originals ball joint. Other radiator colours can be specified on ordering. Prices shown are chrome finished for central heating models. Please see pages 137 & 138 for finishes and colour options.
















OG Ball Joint

	Regency II	Dimensions (mm)			Bar config	Pipe Centres	Output	Output	Electric	Stock or made
BF	BR 30 C	Н	W	D	coning	Centies	BTU's	Watts	wattage	to order
	LG036-BR	825	500	150	2	425	1310	384	300	W
	LG036-BR	825	675	150	2	600	1945	570	300	W
	LG036-BR	825	735	150	2	660	2290	671	400	W
	OG009C-BR	825	500	150	2	425	1310	384	300	W
	OG009B-BR	825	675	150	2	600	1945	570	300	W
	OG009A-BR	825	735	150	2	660	2290	671	400	W

ARCADIA Floor Mounted LG017 / OG017



Arcadia the classic war horse!

A very British design which has stood the test of time. In brass or mild steel manufactured models, with plenty of towel hanging space. Chromed to a mirror finish, other finishes can be specified on ordering. Please see finishes on pages 137 & 138. Prices shown are for central heating models.












For electric element & valve options see pages 131 & 135 LG Ball Joint

Arcadia	Dime	nsions	(mm)	Bar	Face to Face	Output	Output	Stock or made	
MS 15 C	Н	W	D	config	connections	ΔT50°C BTU's	ΔT50°C Watts	element wattage	to order
LG017-MS	850	600	235	7	443	1498	439	2 x 75	√
Arcadia	Dime	Dimensions (mm)			Face to	Output	Output	Electric	Stock
BR 30 H	Н	W	D	config	Face	ΔT50°C BTU's	ΔT50°C Watts	element wattage	or made to order
LG017-BR	850	600	235	7	443	1498	439	2 x 75	W
OG017-BR	850	600	260	7	443	1498	439	2 x 75	W

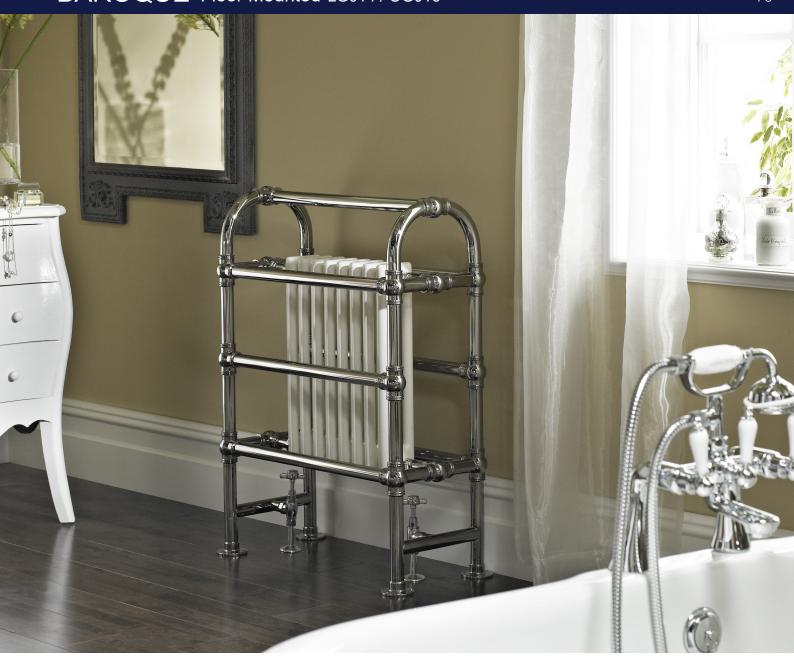

A fixture of yesteryear.

The Baroque uses a classical white mild steel column radiator within a handcrafted, chrome plated, brass framework. Superior heat output and towel hanging space are abundant in this imposing feature design. Many designers place the Baroque in the centre of a bathroom, often next to a free standing cast iron bath. Please see pages 137 & 138 for finishes and colour options. Prices shown are chrome finished for central heating models.















Baroque	Dime	nsions	(mm)	Bar	Face to Face	Output	Output Δ T50°C	Electric	Stock
BR 30 C	Н	W	D	config	connections	BTU's	Watts	element wattage	or made to order
LG014-BR	875	675	325	7	518	2971	871	200 + 300	W
OG016-BR	875	675	350	7	518	2971	871	200 +300	W

REGENCY Wall Mounted LG005 / OG015





















OG Ball Joint

A classic design with a compact height in three different widths. This towel rail looks great situated above the bath, just at the right height for reaching for your luxuriously warm towel! Brass or Mild Steel manufactured framework with an integral white mild steel column radiator. Other colours can be specified. Please see pages 137 & 138 for finishes and colour options. Prices shown are chrome finished for central heating models.

Regency	Dime	Dimensions (mm)		Bar	Pipe	Output Δ T50°C	Output	Electric	Stock
MS 15 C	Н	W	D	config	Centres	BTU's	Watts	wattage	or made to order
LG005-MS	740	675	250	1	600	1938	568	400	✓
Regency	Dime	nsions	(mm)	Bar	Pipe	Output Δ T50°C	Output	Electric	Stock
BR 30 C	Н	W	D	config	Centres	BTU's	Watts	element wattage	or made to order
LG005C-BR	740	500	250	1	425	1310	384	200	W
LG005B-BR	740	675	250	1	600	1846	541	400	W
LG005A-BR	740	735	250	1	660	2193	643	400	W
OG015-BR	740	500	250	1	425	1310	384	200	W
OG015-BR	740	675	250	1	600	1846	541	400	W
OG015-BR	740	735	250	1	660	2193	643	400	W

Ideal for family bathrooms or a special en-suite. Brass or Mild steel manufactured framework with an integral white mild steel column radiator. Brass versions come with an extra towel bar above the column radiator and are available in optional metallic and colour finishes. Please see pages 137 & 138 for finishes and colour options.

Prices shown are chrome finished for central heating models.





LG013FW-MS





LG Ball Joint (

OG Ball Joint





Regency Tall WW	Dillie	1510115	(111111)	config	Centres	Output ΔT50°C	Output ΔT50°C	element	Stock
MS 15 C	Н	W	D	corning	Centres	BTU's	Watts	wattage	or made to order
LG013WM-MS	1403	575	250	2	500	2814	824	400	✓
Regency Tall	Dime	nsions	(mm)	Bar	Face to	Output	Output	Electric	Stock
MS 15 C	Н	W	D	config	Face connections	ΔT50°C BTU's	Δ T50°C Watts	element wattage	or made to order
LG013FW-MS	1500	500	250	2	343	2784	815	400	\checkmark
Regency Tall	Dime	Dimensions (mm)			Face to Face	Output	Output	Electric	Stock or made
BR 30 C	Н	W	D	config	connections	BTU's	Watts	wattage	to order
LG013FW-BR	1500	500	250	3	343	2518	738	400	₩
OG007FW-BR	1500	500	250	3	343	2518	738	400	W

BALLERINA Floor and Wall Mounted LG024A-MS / LG021-MS



This Ballerina wall and floor mounted towel rail is offered in a Legacy ball joint mild steel version as detailed on this page. Prices shown are chrome finished central heating models. The high quality brass versions (opposite) are available with Legacy or Originals Balljoint.









For electric element & valve options see pages 131 & 135 LG Ball Joint

Ballerina	Dimensions (mm)			Bar config	Face to Face	Output	Output	Electric	Stock
MS 15 C	Н	W	D	config	connections	BTU's	Watts	element wattage	or made to order
LG024A-MS	850	600	138	4	453	556	163	75	√
LG021-MS	1548	600	138	5	453	1058	310	150	



High quality brass, supremely durable for longevity. The Ballerina wall and floor is available with your choice of Legacy or Originals ball joint. Prices shown are chrome finished for all heating and hot water systems. Other finishes are available, please see page 138.







For	electric (element a	& valve	options	see	pages	131	& 13	5 LC	Ball Joint	OG Ball	Joint
						. 0						

Ballerina		Dimensions (mm)			Face to Face	Output Δ T50°C	Output ∆⊤50°C	Electric element	Stock or made
BR 30 H	Н	W	D	config	connections	BTU's	Watts	wattage	to order
LG024C-BR	938	575	138	3	418	556	163	75	W
LG024A-BR	938	675	138	3	518	665	195	100	
LG024B-BR	938	825	138	3	668	708	207	100	W
LG021A-BR	1238	525	138	4	368	817	239	125	W
LG021E-BR	1238	675	138	4	518	907	266	125	W
LG021D-BR	1538	525	138	5	368	997	292	125	W
LG021H-BR	1538	675	138	5	518	1116	327	150	W
OG003A-BR	938	575	138	3	418	556	163	75	W
OG003B-BR	938	675	138	3	518	665	195	100	W
OG003C-BR	938	825	138	3	668	708	207	100	W
OG003D-BR	1238	525	138	4	368	817	239	125	W
OG003E-BR	1238	675	138	4	518	907	266	125	W
OG003F-BR	1538	525	138	5	368	997	292	125	W
OG003G-BR	1538	675	138	5	518	1116	327	150	W

BALLERINA Wall Mounted LG010A-MS



The Ballerina wall mounted towel rail is offered in a Legacy ball joint mild steel version, as detailed on this page. Prices shown are chrome finished central heating models.

The high quality brass versions (opposite) are available with Legacy or Originals Balljoint.









Ballerina	Dime	Dimensions (mm) Bar config			Pipe Centres	Output Δ T50°C	Output	Electric element	Stock
MS 15 C	Н	W	D	cornig	Centies	BTU's	Watts	wattage	or made to order
LG010A-MS	750	500	125	1	125	577	160	100	



High quality brass, durable for longevity, the Ballerina is available with your choice of Legacy (as pictured) or Originals ball joint. Prices shown are chrome finished for all heating and hot water systems. Other finishes are available, please see on page 138.















For electric element & valve options see pages 131 & 135 LG Ball Joint OG Ball Joint

Ballerina	Dime	nsions	(mm)	Bar	Pipe	Output	Output	Electric	Stock
BR 30 H	Н	W	D	config	Centres	ΔT50°C BTU's	ΔT50°C Watts	element wattage	or made to order
LG025A-BR	675	675	125	3	600	667	167	100	W
LG025B-BR	675	825	125	3	750	762	190	125	W
LG010A-BR	750	500	125	4	425	577	169	100	W
LG021B-BR	1275	525	125	4	450	817	239	125	W
LG021F-BR	1275	675	125	4	600	907	266	125	W
LG021C-BR	1575	525	125	5	450	997	292	125	W
LG021G-BR	1575	675	125	5	600	1116	327	150	W
OG002B-BR	675	675	135	3	600	667	167	100	W
OG002C-BR	675	825	135	3	750	762	190	125	W
OG002D-BR	750	525	135	4	450	577	169	100	W
OG002A-BR	1275	525	135	4	450	817	239	125	W
OG002E-BR	1275	675	135	4	600	907	266	125	W
OG002F-BR	1575	525	135	5	450	997	292	125	W
OG002G-BR	1575	675	135	5	600	1116	327	150	W

GRANDEUR Floor and Wall Mounted LG032FW



Reflecting the quality and craftsmanship of a bygone age. Manufactured from our most robust 38mm diameter brass tube, this towel rail is of a timeless nature and would sit well in any traditional setting. Available in two heights to suit your requirements.

Brass manufactured with a chrome finish as standard. Bespoke finishes are available at an additional cost. Please see finishes on page 138.








008 **9** 38.1mm

Grandeur	Dimensions (mm)			Bar config	Face to Face	Output	Output	Electric	Stock
BR 30 H	Н	W	D	config	connections	BTU's	Watts	element wattage	or made to order
LG032FW	943	686	163	3	522	830	243	125	W
LG032FW	1243	686	163	4	522	1089	319	200	

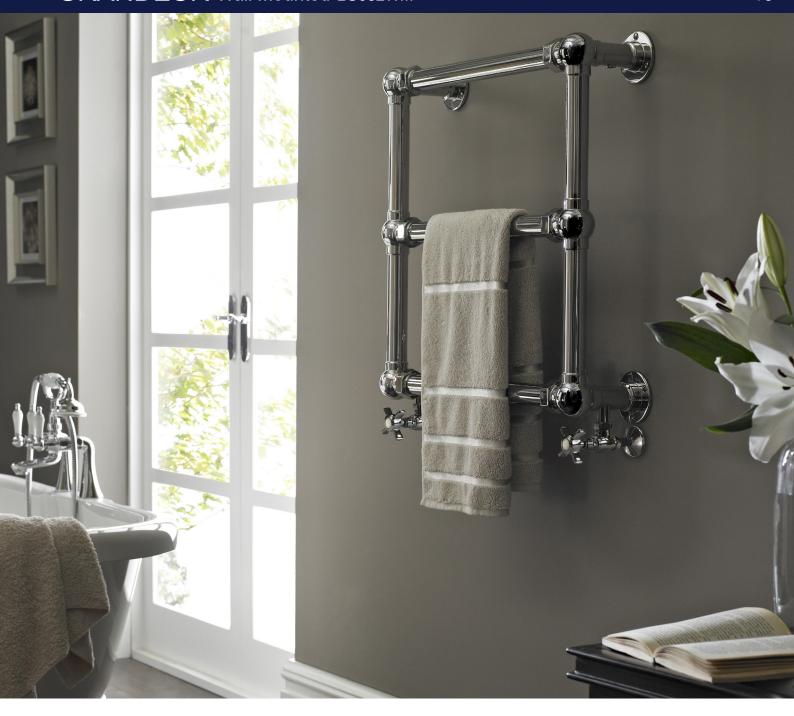

The wall mounted Grandeur is available in two different heights and widths, providing ample warm towel hanging space. With classic looks and robust traditional quality, this towel rail is made to outlive fashion!

Brass manufactured with a chrome finish as standard. Bespoke finishes are available at an additional cost. Please see finishes on page 138.







Grandeur		Dimensions (mm)			Pipe Centres	Output	Output Δ T50°C	Electric	Stock
BR 30 H	Н	W	D	config	Centies	BTU's	Watts	wattage	or made to order
LG032WM	686	686	154	3	600	751	220	100	W
LG032WM	1286	636	154	4	550	1096	321	150	W

BUTLER Floor and Wall Mounted LG035 / OG004















This traditional design is tactile and sturdy, a centrepiece for a classically designed bathroom. Brass manufactured, shown with the Originals ball joint. Chrome finish as standard. Bespoke finishes are available at an additional cost. Please see finishes on page 138.

For electric element & valve options see pages 131 & 135 LG Ball Joint

Butler	Dime	nsions	(mm)	Bar config	Face to Face	Output Δ T50°C BTU's	Output	Electric	Stock or made
BR 30 H	Н	W	D	coring	connections			wattage	to order
LG035	940	488	75	4	268	532	156	100	W
OG004	965	488	75	4	268	532	156	100	

Small is always beautiful. The Hamlet is perfect for en suites and downstairs WCs where space is at a premium, but warm dry towels are still welcomed...

Brass manufactured with a chrome finish as standard with the Originals ball joint.

Bespoke finishes are available at an additional cost. Please see finishes on page 138.







Hamlet	Dimensions (mm)			Bar	Pipe	Output ΔT50°C	Output	Electric	Stock
BR 30 H	Н	W	D	config	Centres	BTU's	Watts	wattage	or made to order
LG037	235	575	125	2	500	270	79	50	₩
OG001	235	575	135	2	500	270	79	50	<u> </u>

ELIZABETH Floor and Wall Mounted LG003 / OG019



With sculptured lines and quality ball joints the Elizabeth has a twist on tradition. Brass or Mild Steel manufactured models Chrome finished as standard. Bespoke finishes are available at an additional cost. Please see finishes on page 138.











For electric element & valve options see pages 131 & 135 LG Ball Joint

OG Ball Joint

Elizabeth	Dime	nsions	(mm)	Bar config		Δ T50°C	Output	Electric	Stock or made
MS 15 C	Н	W	D	config	connections	BTU's	Watts	wattage	or made to order
LG003-MS	963	673	168	7	528	989	290	125	✓
Elizabeth	Dimensions (mm)			Bar	Face to	Output	Output	Electric	Stock
BR 30 H	Н	W	D	config	connections	BTU's	Δ T50°C Watts	element wattage	or made to order
LG003A	938	675	138	7	518	989	290	125	W
LG003B	938	825	138	7	668	1269	372	150	W
OG019A	938	675	138	7	518	989	290	125	W
OG019B	938	825	138	7	668	1269	372	150	W

The wall mounted Elizabeth is available in two widths with your choice of Legacy (as this page) or Originals ball joints. Chrome finished as standard. Bespoke finishes are available at an additional cost. Please see finishes on page 138.




LG Ball Joint OG Ball Joint





Elizabeth		Dimensions (mm)			Pipe Centres	Output	Output	Electric	Stock or made
BR 30 H	Н	W	D	config	Centres	BTU's	Watts	wattage	to order
LG003D	740	675	125	7	600	989	290	125	W
LG003E	740	825	125	7	750	1269	372	150	W
OG019D	740	675	135	7	600	989	290	125	W
OG019E	740	825	135	7	750	1269	372	150	<u> </u>

ART MODERNE Floor and Wall Mounted OG011

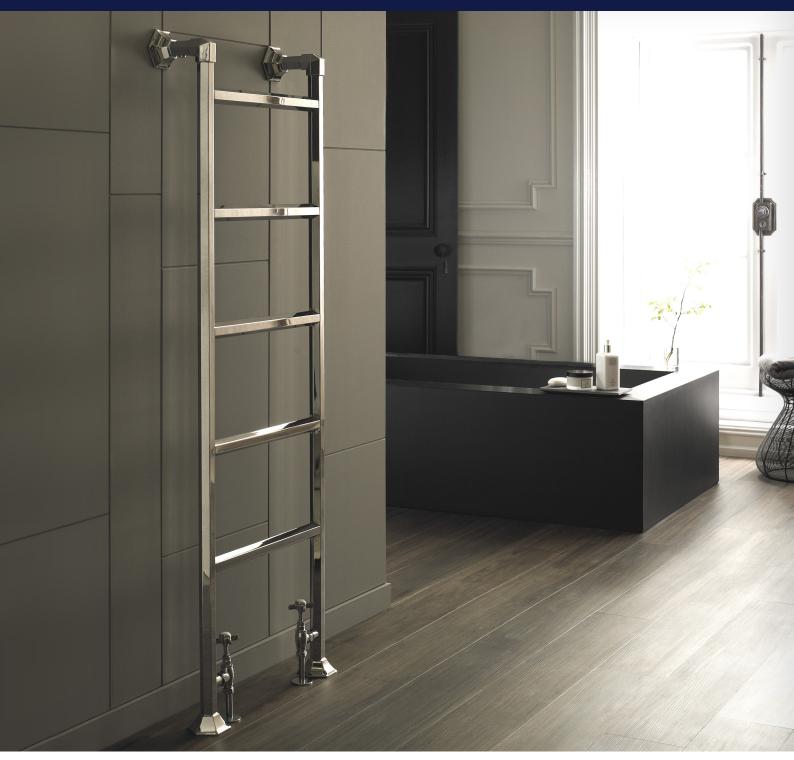

Deco decadence in a nutshell....

High quality hexagonal brass tube manufacture, crafted to a gleaming finish. Available in two sizes and chrome finish as standard. Bespoke finishes are available at an additional cost. Please see finishes on page 138.



Art Moderne	Dime	nsions	(mm)) Bar Face to config Face		Output	Output	Electric element	Stock or made	
BR 30 H	Н	W	D	coning	connections	BTU's	Watts	wattage	to order	
OG011B	943	600	175	3	268	673	197	100	W	
OG011A	1543	550	168	5	378	1084	318	125	W	

Perfect for any bathroom with Deco sanitary and brassware, this ever popular style never fades.

The wall mounted Art Moderne is available in three different sizes to suit your room. Brass manufactured with a chrome finish as standard. Bespoke finishes are available at an additional cost. Please see finishes on page 138.





Art Moderne	Dimensions (mm)			Bar	Pipe	Output	Output	Electric element	Stock or made	
BR 30 H	Н	W	D	config	Centres	ΔT50°C BTU's	Watts	wattage	to order	
OG010A	836	550	145	4	450	720	211	100	W	
OG010B	836	700	145	4	600	844	247	125	W	
OG010C	986	700	145	4	600	899	263	125	W	

ART MODERNE II Wall Mounted LG034



Quality hexagonal brass tube meets a practical brass multirail for an elegant look. Chrome finished as standard. Bespoke finishes are available at an additional cost. Please see finishes on page 138.







Ø

32 HFX + 25.4mm

For electric element & valve options see pages 131 & 135

Unique Art Moderne joint with hexagonal upright and round horizontals



Art Moderne II	Dime	ensions (mm)	Bar	Pipe	Output	Output Δ T50°C	Electric	Stock	
BR 30 H	Н	W	D	config	centres	ΔT50°C BTU's	Watts	element wattage	or made to order	
LG034	700	532	83 - 106	7-7	500	1208	354	125	W	
LG034	1000	482	83 - 106	6-6-6	450	1464	429	150	W	
LG034	1200	482	83 - 106	5-5-5-5	450	1662	487	200	W	

This characterful robustly British towel warmer hails quality and craftmanship.

Made for you with your choice of the Legacy or Originals ball joint (pictured).

Brass manufactured with a chrome finish as standard. Bespoke finishes are available at an additional cost. Please see finishes on page 138.









Ø 31.8 + 25.4mm

Penthouse	Dime	ensions (mm)	Bar config	Pipe centres	Output	Output	Electric	Stock or made
BR 30 H	Н	W	D	coning	centres	BTU's	Watts	wattage	to order
LG018	1100	550	100	20	500	1815	532	200	W
OG020	1100	550	100	18	500	1815	532	200	W

SESTO RONDO III Wall Mounted MD021





For electric element & valve options see pages 131 & 135

The devil is always in the detail... Sesto Rondo's handsome curves and elegant straight lines are designed to maximise hanging space. Brass manufactured with a chrome finished as standard. Bespoke finishes are available at an additional cost. Please see finishes on page 138.

Sesto Rondo III	Dimensions (mm)			Bar	Pipe centres	Output	Output	Electric element	Stock or made
BR 30 H	Н	W	D	config	Centres	BTU's	Watts	wattage	or made to order
MD021	820	507	167	21	175	1157	330	150	24

This chrome finished brass tubed simple design with Legacy ball joints would sit happily in either a traditional or more contemporary setting. Bespoke finishes are available at an additional cost. Please see finishes on page 138. Prices shown are for chrome finished models.











For electric element & valve options see pages 131 & 135 LG Ball Joint

Vintage	Dime	nsions	(mm)	Bar config	Pipe centres	Output ΔT50°C	Output	Electric	Stock or made	
BR 30 H	Н	W	D			BTU's	Watts	wattage	to order	
LG010B	750	475	105	4	400	557	169	100		i

NEXUS GRAND III Wall Mounted TM003



When combinations are right, something good happens!

This towel rail has a great heat output from a twin column radiator inset. It is skillfully combined in a brass framework and chrome plated. The two column radiator inset comes in white as standard, other colours can be specified at an additional cost. Please see pages 137 & 138 for finishes and colour options. Prices shown are chrome finished for central heating models.



Nexus III	Dime	ensions	(mm)	Bar config	Pipe centres	Output Δ T50°C BTU's	Output	Electric element	Stock
BR 30 C	Н	W	D				Watts	wattage	or made to order
TM003	900	525	142 - 160	6	500	2477	726	400	<u> </u>

This single curved bar version is a more modern take on the traditional. With the same great heat output and high quality manufacture.

The mild steel two column radiator inset comes in white as standard, other colours can be specified at an additional cost. Quality brass manufactured framework. Please see pages 137 & 138 for finishes and colour options.

Prices shown are chrome finished for central heating models.





Nexus IV	Dim	ensions	(mm)	Bar config	Pipe centres	Output ΔT50°C BTU's	Output	Electric	Stock or made
BR 30 C	н	W	D		centres		Watts	element wattage	to order
TM004	900	590	214 - 232	3	500	2382	699	400	<u> </u>

SEQUEL V Wall Mounted TM006



The Sequel V has Legacy ball joints and emits a fine traditional sense of style. With brass manufactured framework and a white three column mild steel integral radiator it produces a high heat output. Other radiator colours can be specified.

Prices shown are chrome finished for central heating models. Please see pages 137 & 138 for finishes and colour options.












For electric element & valve options see pages 131 & 135 LG Ball Joint





The Sequel III is manufactured from high quality brass and chrome plated. Curved hanging bars give a modern edge to this traditional style. The three column mild steel radiator inset comes in white as standard, other colours can be specified at an additional cost. Please see pages 137 & 138 for finishes and colour options. Prices shown are chrome finished for central heating models.



Sequel III	Dime	ensions ((mm)	Bar	Pipe centres	Output	Output	Electric	Stock or made
BR 30 C	Н	W	D	config	centres	BTU's	Watts	element wattage	or made to order
TM005	1000	550	182-200	8	475	2527	741	400	W





Kensington BSS004
As pictured with nickel finish (left)



Mayfair BSS003

To suit rounded basins



Chelsea BSS006
Pictured heated and wall mounted



City BSS007 Wall mounted with Art Linea joints

Heated or Unheated Basin Stands

Vogue have developed a range of handcrafted brass basin stands produced to order. The styles illustrated can be altered to suit your exact requirements with your choice of metal finish.

Please contact us for further information and a specific quotation.












Richmond BSS001

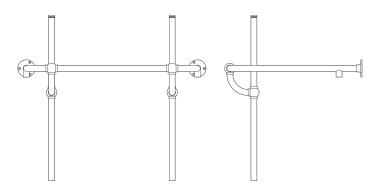

Linea Richmond BSS002

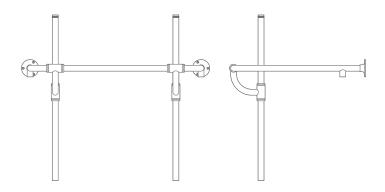

Belgravia BSS005

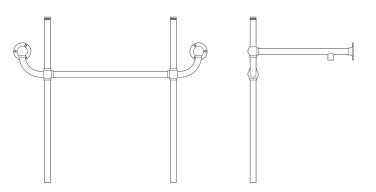


HANDCRAFTED Shower Curtain Rails


Complement Your Bathroom...


Our handmade range of shower curtain rails are beautifully engineered from high quality brass tubing for longevity. As standard they are finished in chrome. Please talk to us if you require other metal finishes or non standard sizes.




Single Ended Oval Wall and Ceiling Mounted SCR2 25.4mm Ø








Straight Wall Mounted SCR3 31.8mm Ø





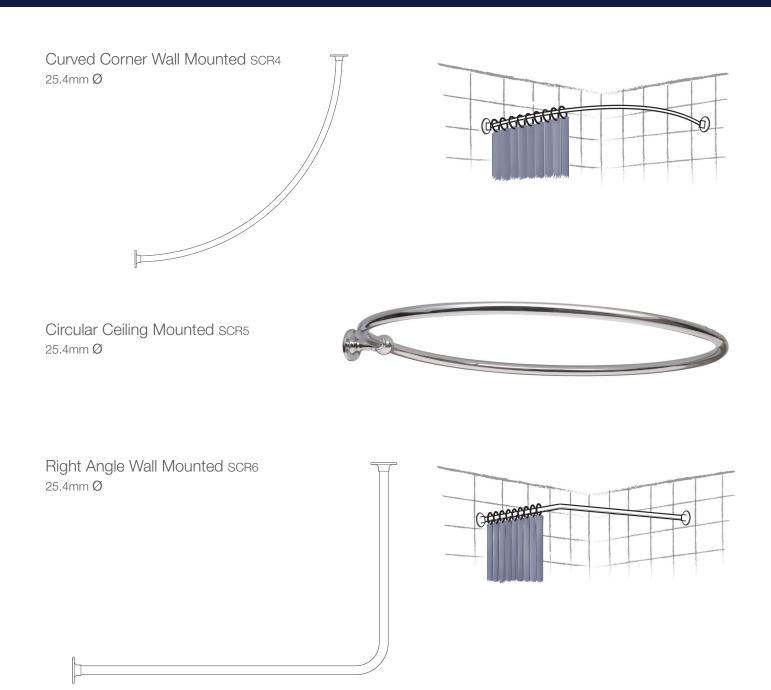

Shower Curtain Rail	Dimensions (mm)		(mm)	Description	Stock or made
BR 30	Н	W	D		to order
SCR1.1	1275	625	325	Oval shape mounted to ceiling	W
SCR1.2	1625	625	325	Oval shape mounted to ceiling	
SCR2.1	1238	675	338	Single ended oval shape mounted to wall and ceiling	W
SCR2.2	1538	675	338	Single ended oval shape mounted to wall and ceiling	W
SCR3.1	1700	-	-	Straight wall mounted bar	W
SCR3.2	2000	-	-	Straight wall mounted bar	W
SCR4.1	938	938	-	Round curve for corner applications	W
SCR4.2	1238	1238	-	Round curve for corner applications	W
SCR5.1		750 Ø		Circular wall mounted	W
SCR5.2		925 Ø		Circular wall mounted	W
SCR6.1	938	638	-	Right angled curve for corner applications	W
SCR6.2	1238	638	-	Right angled curve for corner applications	W
SCR6.3	1538	638		Right angled curve for corner applications	W



be unique

V©GUEDesigner Radiators


Our radiators add warmth and style to any interior scheme. Radiators can be so much more than white panels on a wall.

Vogue UK designer radiators are a mix of classical and contemporary designs.

They come with our pedigree and quality guarantee.



QUILT Wall Mounted DR021

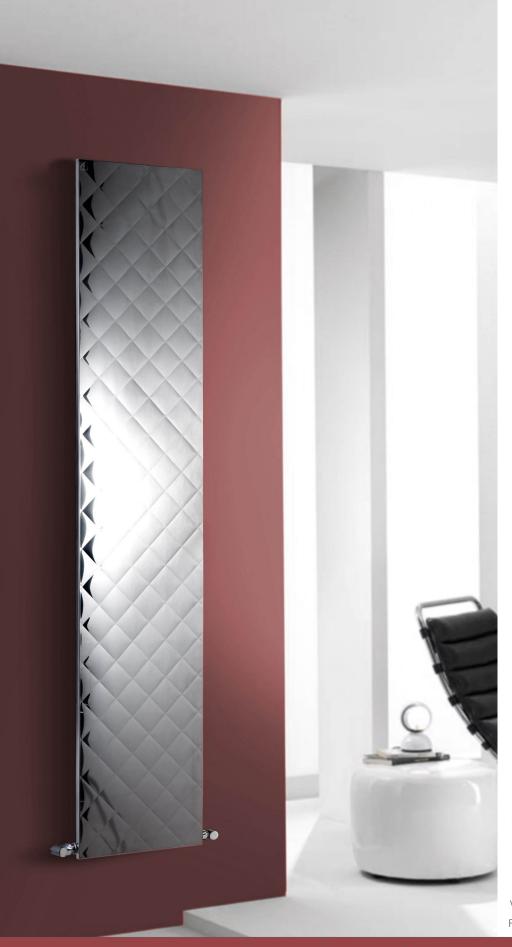

The Quilt is unique. This fabulous design boasts a polished stainless steel facia over a mild steel radiator. The effect of the polished steel with its quilted pattern is a statement piece for any contemporary room.

With a great heat output the Quilt is available in three different sizes.



Optional Accessory

Towel Bar - Stainless Steel

AC032 - 450mm wide



VL003

For other valve options see pages 135

Quilt					Output	Output	Stock
MS 15 C	Н	W	D	connections	ΔT50°C BTU's	Δ T50°C Watts	or made to order
DR021	1805	380	86	380	2217	650	W
DR021	1805	528	86	528	3104	910	W
DR021	1805	676	86	676	3992	1170	W





The Suave has a strong, minimalist design, ideal for more contemporary properties. Manufactured in high quality mild steel and finished in anthracite or white. Please see pages 137 for colour options. Magnetic towel bar is an optional extra, please see page 134.



Anthracite Textured finish option

Suave	Dimensions (mm)			Pipe centres	element	Output	Output	Stock or made
MS 15 C	Н	W	D		wattage	BTU's	Watts	to order
MD056	1800	500	85-100	450	600	2281	669	/

VISION Wall Mounted DR022

A full length mirror built into a stylish tubular radiator makes Vision an asset in every room in your home. Manufactured from high quality mild steel and available in a Chrome, White or Anthracite finish to blend with any décor.





Vision Stock Dimensions (mm) End to End Output Output or made to order connections ΔT50°C Watts MS 15 C A & W Chrome A & W DR022 1800 600 104 600 1612

A bold and clean lined tubular radiator. The Ordinate will integrate well into any room of the house. The radiator is chrome finished and available in four heights, the picture illustrates the tallest model. There are towel rails and robe hooks available to give the Ordinate supreme function for bathrooms and kitchens.

Optional Accessories



Towel Bar - Chrome
AC023A (220mm wide)
AC023B (310mm wide)
AC023C (450mm wide)

Frosted Robe Hook AC031





For other valve options see page 135



Ordinate		ISIONS (m	nm)	of tubes	connections	Output ΔT50°C	Output ΔT50°C	Stock or made
MS 15 C	Н	W	D	or tubes	connections	BTU's	Watts	to order
MD005	1000	270	115	6	270	588	172	1
MD005	1000	362	115	8	362	784	229	/
MD005	1000	454	115	10	454	980	287	/
MD005	1200	270	115	6	270	691	202	\checkmark
MD005	1200	362	115	8	362	921	269	/
MD005	1200	454	115	10	454	1151	337	/
MD005	1600	270	115	6	270	896	262	1
MD005	1600	362	115	8	362	1194	350	✓
MD005	1600	454	115	10	454	1493	437	1
MD005	1800	270	115	6	270	998	292	/
MD005	1800	362	115	8	362	1331	390	1
 MD005	1800	454	115	10	454	1664	487	\checkmark

SQUIRE VERTICAL Wall Mounted DR005



An elegant square tube design with a contemporary feel. However it would also work well in a more traditional interior scheme.


Chromed to a mirror finish with a great heat output. The Squire is available in four different widths.



VL014 25sq + 30sq mm For other valve options see page 135

Squire Vertical	Dim	ensions (mm)		Number of tubes	End to End	Output	Output	Stock or made
MS 15 C	Н	W	D	or tubes	Connections	BTU's	Watts	to order
DR005	1800	325	92 - 117	6	325	1437	421	1
DR005	1800	525	92 - 117	10	525	2388	700	
DR005	1800	725	92 - 117	14	725	3339	979	W
DR005	1800	925	92 - 117	18	925	4290	1257	W

Serenade is a vertical contemporary design radiator, manufactured from high quality mild steel with finish options of chrome, textured matt black & white. Please see pages 137 for colour options.

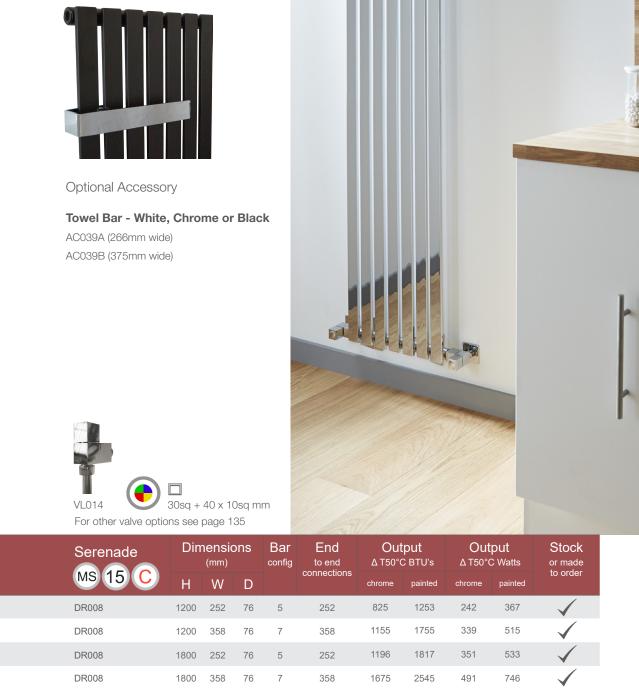

ar fig	End to end onnections	Output Δ T50°C BTU's	Output Δ T50°C Watts	Stock or made to order	

FLY LINE Vertical DR003




Fly Line is a strong, minimalist design ideal for contemporary properties. These radiators come with a choice of single or double panel versions with the double panel offering an increased heat output. Fly Line Vertical and Horizontal are available in a variety of size options and come as standard in white or anthracite. Please see pages 137 for colour options, available on single panel versions only.




Double panel design
Fly Line Vertical in white



Fly Line Vertical		Dimensions (mm)			No of Sections	End to End	Output	Output ΔT50°C	Stock or made
	MS 15 C		W	D		Connections	BTU's	Watts	to order
	DR003 (single panel)	1800	228	84	3	228	1371	402	/
	DR003 (single panel)	1800	376	84	5	376	2286	670	/
	DR003 (single panel)	1800	524	84	7	524	3200	938	/
	DR003 (single panel)	1800	672	84	9	672	4114	1206	/
	DR003DP (double panel)	1800	228	84	3	228	2193	627	/
	DR003DP (double panel)	1800	376	84	5	376	3565	1045	/
	DR003DP (double panel)	1800	524	84	7	524	4991	1463	/
	DR003DP (double panel)	1800	672	84	9	672	6417	1881	\checkmark

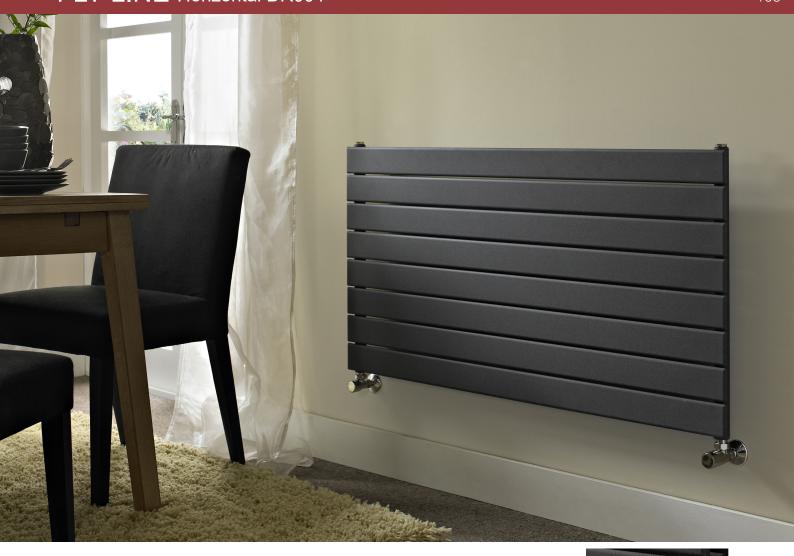





For other valve options see page 135

Optional Accessory for single panel Fly Line

Towel Bar - Stainless Steel

AC032 - 450mm wide



Fly Line Horizontal	Dimensions (mm)			No of Sections	End to End	Output ∆⊤50°C	Output ∆⊺50°C	Stock or made
MS 15 C		W	D		Connections	BTU's	Watts	to order
DR004 (single panel)	450	900	81	6	850	1433	420	/
DR004 (single panel)	450	1200	81	6	1150	1883	552	\checkmark
DR004 (single panel)	598	900	81	8	850	1910	560	/
DR004 (single panel)	598	1200	81	8	1150	2511	736	/
DR004DP (double panel)	450	900	126	6	850	2231	654	1
DR004DP (double panel)	450	1200	126	6	1150	2927	858	1
DR004DP (double panel)	598	900	126	8	850	2975	872	1
DR004DP (double panel)	598	1200	126	8	1150	3903	1144	\checkmark

SONATA Wall Mounted DR007



Contemporary styled Sonata has oval tubes with stunning good looks; these radiators will complement many areas of the home. Available in chrome, white or textured matt black finish. Please see pages 137 for colour options.





A statement piece that oozes sophistication and practical good looks, with a bank of closely fitting oval tubes to provide aesthetic appeal and efficient heat output. Available in chrome or white. Please see pages 137 for colour options.



Unique oval tubing

Lure	Din	nensio	ons	Bar config	End to end connections	Out	t put C BTU's		put C Watts	Stock or made
MS 15 C	Н	W	D		Connections	chrome	white	chrome	white	to order
DR020	1800	352	83	6	352	1697	2562	497	751	/

MODE II CN027



CN027

CN027

CN027

CN027

Contemporary styling with sleek rounded tubes. Mode II has all the attributes of a great column radiator with edgy attitude. These wall hung radiators will complement many areas of the home. Available in white RAL 9016 and Anthracite as standard. Please see page 137 for other colour options.

450



VL004 Arne Thermostatic option



For other valve options see page 135



Anthracite option (non-textured)



Optional Accessories

Towel Bar - White, Chrome or Anthracite


AC034A (60 x 200mm wide) AC034B (60 x 340mm wide) AC034C (60 x 480mm wide)





Feet - White or Anthracite

AC038







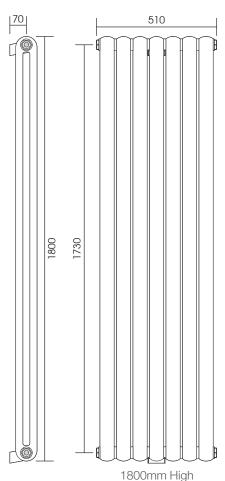

MODE Wall or Floor



Mode suits traditional properties, yet also looks great in contemporary settings.

Available in a wide range of sizes, so you can choose a radiator which exactly suits your space and required heat output. The standard colour finish is white RAL 9016. Other RAL colours are available. Please see page 137 for other colour options.

Wall brackets are included, feet and other fixing accessories are detailed on the next pages. Please see page 135 for valve options.

Standard Stock Sizes (opposite)

We stock 2, 3 and 4 column radiators. Heights range from 300mm great for under window sills, to a 1800mm tall version. There are many sizes in between.

Non Standard Sizes

(next pages)

Non standard sizes include 5 and 6 columns ranging from 300mm - 2000mm high and detailed on the next pages. Non stocked and colour finish options have an eight week lead time.




VL004 Arne Thermostatic option





003





For other valve options see page 135














	6 Columns

Mode		ensions (r xcluding fee		Number Of Sections	Output ΔT50°C	Output	Stock or made
MS 15 C	Н	W	D	Or Occilons	BTU's	Watts	to order
2 Column Radiators							
2C-050-10	500	460	68	10	1266	371	√
2C-050-18	500	812	68	18	2280	668	/
2C-050-22	500	988	68	22	2788	817	✓
2C-060-10	600	460	68	10	1502	440	/
2C-060-14	600	636	68	14	2102	616	✓
2C-060-18	600	812	68	18	2703	792	√
2C-060-22	600	988	68	22	3303	968	\checkmark
2C-060-24	600	1076	68	24	3604	1056	✓
2C-060-28	600	1252	68	28	4204	1232	\checkmark
2C-180-6	1800	284	68	6	2641	774	\checkmark
2C-180-8	1800	372	68	8	3522	1032	\checkmark
2C-180-10	1800	460	68	10	4402	1290	✓
2C-180-12	1800	548	68	12	5282	1548	✓
3 Column Radiators							
3C-050-14	500	636	100	14	2457	720	1
3C-050-18	500	818	100	18	3160	926	/
3C-050-22	500	988	100	22	3859	1131	
3C-050-24	500	1076	100	24	4211	1234	
3C-050-28	500	1252	100	28	4914	1440	
3C-060-10	600	460	100	10	2078	609	
3C-060-14	600	636	100	14	2908	852	· /
3C-060-18	600	812	100	18	3743	1097	/
3C-060-20	600	900	100	20	4156	1218	—
3C-060-24	600	1076	100	24	4989	1462	· /
3C-060-30	600	1340	100	30	6234	1827	1
3C-075-10	750	460	100	10	2559	750	/
3C-075-14	750	636	100	14	3583	1050	1
3C-075-18	750	818	100	18	4607	1350	/
3C-075-22	750	988	100	22	5630	1650	✓
3C-075-26	750	1164	100	26	6654	1950	✓
3C-180-8	1800	372	100	8	4818	1412	1
3C-180-10	1800	460	100	10	6019	1764	✓
3C-180-12	1800	548	100	12	7224	2117	\checkmark
4 Column Radiators							
4C-030-20	300	900	140	20	2901	850	1
4C-030-30	300	1340	140	30	4351	1275	/
4C-060-14	600	636	140	14	3914	1147	/
4C-060-18	600	818	140	18	5033	1475	/
4C-060-20	600	900	140	20	5589	1638	1
4C-060-24	600	1076	140	24	6708	1966	· /
4C-075-14	750	636	140	14	4835	1417	1
4C-075-18	750	818	140	18	6217	1822	· /
4C-075-22	750	988	140	22	7599	2227	1
4C-075-26	750	1164	140	26	8981	2632	· /
							,

MODE Bespoke



This service gives the opportunity to order non standard sizes. Choose from wall or floor standing. These radiators are supplied in white RAL 9016. Coloured finishes are available, please see the colour chart on page 137. The lead time for delivery is approximately eight weeks. The sections cannot be joined on site. We only supply complete radiators, practical considerations need to be given to weight, carriage, handling and accessibility. Where necessary large radiators can be supplied in module format. Contact our sales office for further information.



For other valve options see page 135

Accessories for Mode Column Radiators

Stock or made to order

Calculations for Sizing a Radiator...



Column Radiator Feet AC028



Required output is 1200 watts

Space available is 1000 mm high x 750 mm wide. Approx radiator dimensions 900mm high x 600mm wide.

(Taking into account space for valves)



Adjustable Feet AC024 Height from 90mm to 120mm. Must only be used with top retaining stay.



Number of sections possible

Width (600mm) divide by 45mm per section + allowance for each side. 600 - 24 divided by 45 = 12 sections.



Base Plate Cover AC025 For use with adjustable feet (above).



Heat output per section

Divide your required output by sections. 1200 watts divided by 12 = 100 watts per section.



Heavy Duty Wall Brackets

Available for 2 to 6 column radiators.

Top Retaining Stay AC026

For use with adjustable feet.



Selecting your radiator section

4-750 @102 watts per section. Therefore 12 sections @102 per section = 1224 watts @ 50 degrees C delta T.



Standing Brackets
For use with glass walls etc...



Price calculation

 $12 \times £37.00 = £444.00$ ex VAT Plus feet if floor standing and any other non standard support brackets you may require.



Welded Feet (Increase height by 100mm) Up to 20 sections requires two feet 21 to 40 sections three feet

41 to 58 sections four feet



Dimensions

The nominal overall length of a radiator =number of section x 45mm = 24mm for reducing bushes (12mm each end). Subject to manufacturing tolerance of +/- 0.6mm per section.

Mode Sections	Dimensio	ns (mm)	Output	Stock
MS 15 C	excludir	ig feet	ΔT50°C Watts	or made to order
	Н	D	watto	to order
2 Column Section				
2-300	300	68	24	*
2-400	400	68	31	3
2-500	500	68	37	≥
2-600 2-750	600 750	68 68	44 55	3
2-900	900	68	65	W
2-1000	1000	68	72	*
2-1200	1200	68	86	₩
2-1500	1500	68	108	₩
2-1800	1800	68	129	***
2-2000	2000	68	144	¾
3 Column Section				
3-300	300	100	33	₩
3-400	400	100	42	***
3-500	500	100	52	₩
3-600	600	100	61	2
3-750 3-900	750 900	100	75 90	2
3-1000	1000	100	99	2
3-1200	1200	100	118	3
3-1500	1500	100	147	**
3-1800	1800	100	177	*
3-2000	2000	100	197	*
4 Column Section				
4-300	300	140	43	≥
4-400	400	140	56	2
4-500	500	140	69	*
4-600	600	140	82	*
4-750	750	140	102	*
4-900	900	140	121	**
4-1000	1000	140	134	₩
4-1200	1200	140	159	2
4-1500 4-1800	1500 1800	140 140	197 235	<u> </u>
4-2000	2000	140	260	**
	2000		200	
5 Column Section				21
5-300	300	177	52	₩
5-400 5-500	400 500	177 177	68 83	3
5-500	600	177	98	<u> </u>
5-750	750	177	121	**
5-900	900	177	143	*
5-1000	1000	177	158	>>
5-1200	1200	177	188	3
5-1500	1500	177	232	3
5-1800	1800	177	277	<i>*</i>
5-2000	2000	177	307	>>
6 Column Section				
6-300	300	215	63	*
6-400	400	215	82	***
6-500	500	215	101	₩
6-600	600	215	120	3
6-750	750 900	215	148	≥
6-900 6-1000	1000	215 215	175 193	3
6-1200	1200	215	229	<u> </u>
6-1500	1500	215	282	2
6-1800	1800	215	334	3
6-2000	2000	215	369	3



be different

V®GUEElectric Products

Vogue UK have a comprehensive range of electrical products including –

Towel Warmers


Radiators

Electric Underfloor Heating

Envirovent fans



EVO Wall Mounted ER003

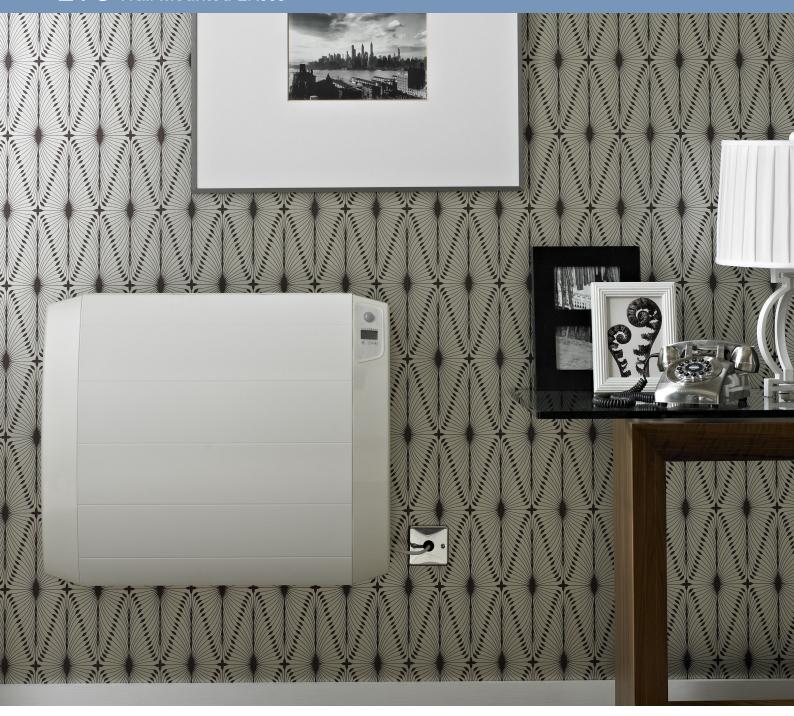

The ultimate in stylish heating technology. Good looks combined with the latest smart technology. Manufactured utilising the excellent heat retaining natural stone 'Steatite'. Evo has an easy to use digital programme controller and revolutionary presence detector. If the room is being heated but not used for prolonged periods, the sensor will automatically, gradually reduce the amount of energy being consumed. Clever stuff... Available in three different sizes. Electrical components are covered by a two year warranty.

Evo (IP20)	Dime	ensions (mm)	Power	Stock
E 15	Н	W	D	wattage	or made to order
ER003	600	550	120	1000	W
ER003	600	710	120	1500	
ER003	600	870	120	2000	W



Manufactured from high quality cast iron, this radiator is suited to traditional and period properties. The Romantique is primed in a classic lead colour finish.

The floor mountings and wall stays are supplied in chrome, nickel or brass, please state on ordering.

Bespoke sizes are available. Electrical components are covered by a two year warranty.

Romantique	Dime	ensions (mm)	Number of	Power	Stock
E 15	Н	W	D	Sections	Wattage	or made to order
4C-0970-10E	970	700	144	10	2000	✓
4C-0370-19E	370	1240	144	19	900	/
4C-0670-10E	670	700	144	10	1200	\checkmark
4C-0490-11E	490	820	221	11	1500	/

ECO and STROMBOLI Wall ER001 / ER002





Eco is a cost effective electric radiator which allows you to control room temperature. It also has an integral economy function and frost protection.

A sleek unit with digital programmable technology. The programmer can be safety locked to avoid accidental alterations. Stromboli has a comfort, economy and frost protection settings, great for houses unoccupied for weeks at a time.

Both models are available in five different sizes. Electrical components are covered by a two year warranty.

Eco (IP24)	Dim	ensions (mm)	Number of	Power	Stock
MS 15 E	Н	W	D	Sections	wattage	or made to order
ER001	580	370	80	4	500	W
ER001	580	530	80	6	750	W
ER001	580	690	80	8	1000	W
ER001	580	770	80	9	1250	W
ER001	580	930	80	11	1500	W
Sromboli (IP20)	Dim	ensions (ı	mm)	Number of	Power	Stock
MS 15 E						
	Н	W	D	Sections	wattage	or made to order
ER002	580	470	D 100	Sections 4	wattage 500	
						to order
ER002	580	470	100	4	500	to order
ER002 ER002	580 580	470 630	100	4 6	500 750	to order



The Mode electric radiator compliments traditional and contemporary interiors to a tee. Manufactured from mild steel, supplied as standard in a white RAL 9016 powder coated finish. Most RAL colours are available as a special order. Available in seven stock sizes, 2 - 3 weeks delivery wall mounted. 4 - 6 weeks floor mounted with welded feet. Bespoke sizes are can be arranged. Electrical components are covered by a two year warranty.

Electric Controls

- White as standard.
- Matt chrome finish is available.
- Temperature control between 10°C and 65°C.
- Led power indicator with frost protection.





Mode	Dim	ensions (mm)	Number	Power	Stock
MS 15 E	Н	W	D	of sections	wattage	or made to order
2C-1800-12E	1802	634	63	12	1500	√
3C-0600-10E	602	544	101	10	900	\checkmark
3C-0600-14E	602	724	101	14	1200	\checkmark
3C-0600-20E	602	994	101	20	1500	\
4C-0600-18E	602	904	139	18	1500	/
4C-0300-30E	302	1444	139	30	1500	✓
4C-0600-24E	602	1174	139	24	2000	\checkmark

COMFORT Wall Mounted EL028



Comfort is ideal for compact situations. It is electric only and is manufactured in high quality mild steel, chromed to a mirror finish. Electrical components are covered by our two year warranty.

Uncomplicated and chic. The linear styling of Simplicity adds a sense of sophistication to any room. Slimline and discreet it provides the comfort of warm fluffy towels or bathrobes. This is electric only and is manufactured in high quality stainless steel. Electrical components are covered by our two year warranty.





EL022 Simplicity Arc Round tube.

EL025 Simplicity Linc Square tube.



EL022 Simplicity Arc Round tube LED Top.

Robe Hooks Available



Round (AC022A)



Square (AC022B)



Simplicity Arc and Linc	Dimensions (mm)	Description	Stock
SS 2 E	Н		or made to order
EL022	820	Round Tube	√
EL022	1720	Round Tube	\checkmark
EL025	820	Square Tube	\checkmark
EL025	1720	Square Tube	/

ENVIROVENT

SILENT Design 100

- Silent elastic blocks
- Sealed for life ball bearings
- Back draught shutter and airflow guide vanes
- High performance and quality
- Incredibly silent running
- Energy efficient
- 8 Watts / 230 Volts
- IP45 rated



A range of 100mm domestic axial extract fans for wall or ceiling installations, designed to solve ventilation problems in WC's and bathrooms. Fitted with motors mounted on silent elastic blocks, the fans deliver incredibly silent running and exceptional performance and stylish design.

ECO dMEV

- Up to 6 adjustable trickle speed settings
- Timer, humidity sensor and pull cord models
- Complies with Building Regulations. Part F for system 3 Continuous Mechanical Extract
- SAP Appendix Q eligible achieving a low specific fan power of 0.28 W/l/s
- Incredibly silent running Below 20 dB(A)
- One fan for all situations, both walls and ceilings
- Low Energy DC 1.5 Watts Low voltage version available
- 4 Interchangeable front panel trims



The ECO dMEV has been designed and developed to offer the market a constant volume, continuously running, decentralised extract fan for the lowest power consumption, the lowest noise and lowest lifecycle costs.

SILENT MV

- Sound absorbent insulation
- Incredibly silent running
- 360° rotating connection box
- Sealed for life ball bearings
- Fitted with a two speed motor
- Complies with building regulations
- High performance with flexible location
- Easy installation and maintenance
- IP44 rated

The SILENT MV fan range offers one of the most versatile fan systems on the market today. Due to its flexibility it can be used in a multitude of small and medium fan installations. Especially advantageous in applications where the system may be running for long periods throughout the day, the acoustic benefits of the SILENT MV fans ensure that optimum comfort is achieved without the disturbance of noisy ventilation systems.

SILENT 100

- Also available in silver on silent elastic blocks
- Sealed for life ball bearings
- Back draught shutter and airflow guide vanes
- High performance and quality
- Incredibly silent running
- Significant energy savings
- 8 Watts / 230 Volts or 13 Watts / 12 Volts options
- IP45 / IP57 SELV version



100mm domestic axial extract fans for wall or ceiling installations. Designed to solve ventilation problems in WC's and bathrooms. Fitted to motors mounted on silent elastic blocks, fans are incredibly silent running and exceptional performance.

Optional Kits



ENV-WALL KIT



ENV-CEILING KIT



ENV-SOFIT KIT



ENV-3M FLEX



ENV-6M FLEX

Fan	Description	Airflow rates //s (m³/h)	Stock or to order
Silent Design 100			
SILDES100 S	White Standard Model	22 (85)	√
SILDES100 SS	Silver Standard Model	22 (85)	/
SILDES100 T	White Timer Model	22 (85)	✓
SILDES100 TS	Silver Timer Model	22 (85)	/
SILDES100 HT	White Adjustable Humidity Sensor Model	22 (85)	✓
SILDES100 HTS	Silver Adjustable Humidity Sensor Model	22 (85)	1
Eco dMEV			
Eco dMEV S	Standard Model	18 (65)	W
Eco dMEV T	Adjustable Run-On Timer Model	18 (65)	W
Eco dMEV HT	Adjustable Humidity Sensor and Timer Model	18 (65)	W
Eco dMEV HTP	Pull Cord Adjustable Humidity Sensor and Timer Model	18 (65)	W
Eco dMEV S SELV	Standard (SELV) Model	18 (65)	W
Eco dMEV T SELV	Adjustable (SELV) Run-On Timer Model	18 (65)	<u> </u>
Eco dMEV HT SELV	Adjustable (SELV) Humidity Sensor and Timer Model	18 (65)	W
Eco dMEV HTP SELV	Pull Cord Adjustable (SELV) Humidity Sensor and Timer Model	18 (65)	W
Silent MV			
SILMV 160100 S	Silent 2 speed in line fan	50 (80)	✓
SILMV 160100 T	Silent single speed inline fan with adjustable timer	50 (80)	/
SILMV 250100 S	Silent 2 speed in line fan	50 (80)	W
SILMV 250100 T	Silent single speed inline fan with adjustable timer	50 (80)	W
Silent 100			
Silent-100 S	Standard Model	26 (95)	√
Silent-100 T	Adjustable Timer Model	26 (95)	✓
Silent-100 IT	Intelligent Timer Model	26 (95)	W
Silent-100 HT	Adjustable Humidity Sensor Model	26 (95)	/
Silent-100 PIR	PIR Model	26 (95)	W
Silent-100S 12V	Standard Model (SELV)	26 (95)	W
Silent-100 T 12V	Adjustable Timer Model (SELV)	26 (95)	W
Silent-100 TP 12V	Adjustable Timer and Pullcord Model (SELV)	26 (95)	W
Silent-100 P 'EV' (12V 50)	Pullcord (SELV)	26 (95)	W
Silent-100 HTP 12V	Adjustable Timer, Humidity Sensor and Pullcord Model (SELV)	26 (95)	W
Silent-100 SS SILVER	Silver Standard Model	26 (95)	1
Silent-100 ST SILVER	Silver Adjustable Timer Model	26 (95)	√
Optional Kits			
ENV-WALL KIT	Wall Grill and pipe		1
ENV-CEILING KIT	Ceiling Vent, 6M Flex and 2 flex ties		1
ENV-SOFIT KIT	Wall grill, 3M Flex and 2 flex ties		\checkmark
ENV-3M FLEX	3 metre flex 100 dia		/
ENV-6M FLEX	6 metre flex 100 dia		\checkmark

ELECTRIC Underfloor Heating

There is nothing that quite matches the comfort of warm feet when getting out of the bath or shower, especially in the cold winter months! Imagine stepping onto warm tiles controlled to the temperature you prefer.

Electric underfloor heating works by gently warming the mass of floor which in turn warms the rest of the room. Our underfloor heating kit is quick and easy to install. Ideally timed when you are fitting a new kitchen or bathroom.

Electrical components are covered by a two year warranty.

The Underfloor Heating Kit Includes

- The correct size heating mat.
- Digital touch screen timer and thermostat.
- Floor sensor and floor sensor mounting pipe.
- Multimeter to check installation at every stage.
- Comprehensive installation manual and control card.





Putting You in Control...

The digital touch screen, completely programmable timer and thermostatic controller enables you to fully regulate the temperature and control when the heating is on or off. The manual override means at the touch of a button the temperature can be higher or lower to suit as and when it is needed.

EUFH E 15	Area Metre(s) _{Square}	Rated Power Wattage per mat	Stock or made to order
EUFH150-01.0	1.0	150	1
EUFH150-01.5	1.5	225	/
EUFH150-02.0	2.0	300	/
EUFH150-02.5	2.5	375	/
EUFH150-03.0	3.0	450	/
EUFH150-03.5	3.5	525	/
EUFH150-04.0	4.0	600	/
EUFH150-04.5	4.5	675	/
EUFH150-05.0	5.0	750	/
EUFH150-06.0	6.0	900	/
EUFH150-07.0	7.0	1050	/
EUFH150-08.0	8.0	1200	/
EUFH150-09.0	9.0	1350	/
EUFH150-10.0	10.0	1500	/
EUFH150-12.0	12.0	1800	\checkmark





bechoosy

V®GUE

Additions and Accessories

So you've found your perfect towel rail... Now add the perfect finishing touches. From high quality valves to the latest technology in heated electric elements....



ELECTRIC ELEMENT ONLY Prices



Standard Element

IP55 Suitable for zones 1 and 2 of the bathroom.

Each standard element contains an internal preset over the temperature switch and fail safe fuse. There is no thermostatic control although a suitably rated rheostat (CD-VR) will give thermal control when fitted into the electrical supply circuit.

Available as a summer kit for dual fuel options. See Page 133 for tee piece AC003

Product	Watts
EE002	75w
EE002	100w
EE002	125w
EE002	150w
EE002	200w
EE002	300w
EE002	400w
EE002	600w



Electronique Element

IP66 Suitable for zones 1 and 2 of the bathroom.

The standard Electronique element is set to a constant surface temperature of 52°C, with no need for external controls. In the fully loaded towel warming mode it will act to reduce power and save running costs. In space heating mode it will increase the power to deliver background heat needed to the maximum of its rated capacity. A safe to touch system, with safety measures incorporated.



Available as a summer kit for dual fuel options. See Page 133 for tee piece AC003

Product	Watts
EE001A	200w
EE001A	400w
EE001A	600w



Contract Fixed Heat / LST Electronique Flement

IP55 Suitable for zones 1 and 2 of the bathroom. Fixed Heat is designed as an energy saving element to control temperature and consume only the correct amount of power required. It maintains your pre-set temperature whether the rail is in a cold bathroom empty or fully loaded with towels. Fixed Heat for LST (low surface temperature) of 43 °C must be chosen to comply with LST legislation for use in public buildings, hospitals and care homes.

Product	Watts
EE001C	200w
EE001C	400w
EE001C	600w



Thermostatic Element

IP44 Suitable for zone 2 of the bathroom.

Electronically controls room temperature and has a two hour boost function. It also has the benefit of a frost protection function.



Available as a summer kit for dual fuel options. See Page 133 for tee piece AC003

atts
50w
50w
00w



Remote Controlled Heat Element

IPX4 suitable for zones 1 and 2 of the bathroom.

Negative Temperature Coefficient technology

7 day programmable element with remote control switches the towel rail on and off when you want, at the temperature you want. Eco, boost and safety lock features included, and manual override allows you total flexibility when needed. Can be retro fitted to existing electric or dual fuel multirail towel rails.



*Please note, Element only suitable for vertical installation

Available as a summer kit for dual fuel options. See Page 133 for tee piece AC003

Product	Watts
EE005	300w
EE005	600w
EE005	900w



Heat Sensor Element

IPX5 suitable for zones 1 and 2 of the bathroom. Five temperature settings ranging from 30°C to 60°C. The device displays the temperature to which it is currently set and indicates the status of the heating cycle.



Optional accessory is the cover shroud to hide the cable

Product	Watts
EE006	200w
EE006	300w
EE006	400w
EE006	600w
EE006	800w
EE006	1000w





Mulitirail Option (H) and (C)

Heating Only Options



Heating and Hot Water this is suitable for all heating and hot water systems. For connection to either direct (open) or indirect (closed) central heating systems.



Suitable for indirect (closed) central heating circuits only. It cannot be intalled on an open circuit due to the product containing ferrous (steel) parts.







Mulitirail Option (E)

Electric Only Options



A completely independent unit requiring only a fused spur electric connection. Thermal transfer fluid is heated by an electric element within the towel rail.



Standard Rail Option (D)

Mulitirail Option (D)

Dual Fuel Options



The towel rail has the capability to run from a central heating circuit or an electric element. Handy in the summer months when the central heating is turned off.

Please Note:

When using the electric element only (ie; during summer), allowance must be made for thermal expansion within the product by having the 'return' radiator valve left partially open. The 'flow' radiator valve must be closed to prevent back flow through the system. Both valves should be opened and balanced when the central heating system is operative, (i.e. during winter).

Steel Rails - Must be installed in accordance with BS7593 where a corrosion inhibitor is used.

Brass Rails - Caution where water softener is installed, as this could cause dezincification (material is attacked ie. zinc eaten away by aggressive water).

Brass towel rails are manufactured using dezincification resistant brass, however it should be understood that the term 'resistant'does not entirely preclude the possibility of dezincification occurring. If you intend to install the product on an open (DHW) circuit, make reference to your local water authority to ensure dezincification has not previously occurred. Towel rails manufactured from brass tubing should not be installed on an open circuit if a water softener is present. Water analysis to determine the likelihood of dezincification is available at cost.

Models suitable for indirect (closed) circuits only cannot be installed on an open circuit due to the item containing ferrous (steel) parts. Product compatibility is the responsibility of the installer.

FITTED ELECTRIC & DUAL FUEL Pricing

This section contains a range of elements with price supplements for electric and dual fuel models.

Please add the price of your element to the model you choose and we will build it for you.



Standard Element IP55 Code EE002

A benchmark element to suit each size of product.

- E Electric Only
- Dual Fuel



Thermostatic Element IP44 Code EE003

Variable room temperature control function.

- E Electric Only
- Dual Fuel



Fixed Heat / LST Electronique Element IP55 Code EE001C

Ideal for LST applications where surface temperatures need to be guaranteed.

E Electric Only



Electronique Element IP66 Code EE001A

Maintains surface temperature of product to 52 $^{\circ}\text{C}.$

- E Electric Only
- Dual Fuel



Remote Controlled Heat Element IPX4 Code EE005

NTC – Negative Temperature Coefficient technology. Remote controlled programmable element for adjustable temperature control.

- E Electric Only
- Dual Fuel



Heat Sensor Element IPX5 Code EE006

An electronic temperature sensor control.

- E Electric Only
- Dual Fuel
- * Dual fuel models will also be supplied with a conversion tee where applicable. This can be used with VL013 valves for a mulitrail. Alternatively to a conversion tee dual fuel valves VL015 can be used.

All the images of elements depict electric only versions. Dual fuel configurations may vary including element positioning. The appropriate standard versions will be supplied in all cases unless advised otherwise.

Electric towel rails are filled with a glycol ethylene / water mix to strict guidelines. This improves the thermal transfer rate and acts as a corrosion inhibitor.

All electric and dual fuel towel rails must be fitted by a qualified person.

The elements are fitted on the right hand side as standard. They can be left hand mounted on request.

This section contains information on electrical safety.

IEE Wiring Regulations have identified the following zones and IP ratings to ensure safety.



IP Zoning

ZONE 0

Inside the bath or shower. Any fitting here must be SELV (max 12v) and a minimum rating of IPX7. (Protection against immersion in water).

ZONE 1

Above the bath or shower to a height of 2.25m. A minimum rating of IPX4 is required * See note 1.

ZONE 2

The area stretching to 0.6m outside the bath or shower and above the bath or shower if over 2.25m. A minimum rating of IPX4 is required * See note 1.

OUTSIDE ZONES

Anywhere outside zones 0, 1, and 2. Where water jets are not used for cleaning purposes, the general rules BS7671 apply. * See note 1.

All final circuits require 30mA RCD protection.

Notes

- In zones 1 and 2 if there is a likelihood of water jets being used for cleaning purposes a minimum of IPx5 is required.
- Where ceiling heights exceed 2.25m, the zones are effectively up to 3m, beyond 3m the walls are out of scope.
- Basins are not covered, however they are usually considered zone 2.
- If the space underneath a bath cannot be accessed without tools that space is considered out of zone.
- Information contained on this page is for guidance only. Please refer to current IEE Regulations or a qualified electrician.

IP Rating Guide

The IP (ingress protection) rating given to an enclosure states the degree of protection of offers by means of two digits. A summery of these are detailed below. For more information please see IEC 529: 1989 BSEN 65029:1992.

First Digit

Protection against solid foreign objects and access to hazardous parts.

At the lowest of seven levels is 0, this means no protection is offered. At the highest level 6, there shall be no entry of dust particles.

Second Digit

Protection against entrance of water on a progressive scale. At level 1 dripping water shall have no effect. at level 6 water from powerful jets against the enclosure shall have no effect.

The letter X can be used in place of the first digit or second digit to indicate that tests have not being carried out or are not applicable.

0	3	No protection.	0	3	No protection.
1	5	Protected against solid objects larger than 50mm e.g. accidental touch by hands.			Protected against vertically falling drops of water e.g. condensation.
2	53	Protected against solid objects larger than 12.5mm e.g. fingers.	2	3	Protected against direct sprays of water up to 15° from the vertical.
3	5	Protected against solid objects larger than 2.5mm e.g. tools and cables.	3	3	Protected against direct sprays of water up to 60° from the vertical.
4	3	Protected against solid objects larger than 1mm.	4	3	Protected against water splashed from all directions - limited ingress permitted.
5		Protected against dust (no harmful deposits).	5	3	Protected against low pressure jets of water from all directions - limited ingress permitted.
6	3	Totally protected against dust.	6	3	Protected against strong jets of water e.g. for use on ship decks - limited ingress permitted.
					Dueta et e el e escipet the

IEC 529, bs en 60529 does not apply to any risk of explosion or conditions such as humidity, corrosive gases, fungi or vermin. In certain cases equipment designed to be mounted in an enclosure will contribute towards the stated IP rating (eg Push buttons mounted in an enclosure). Different parts of enclosures can have different degrees of protection and still conform to the standard (e.g. Enclosures with pre-drilled conduit entry. All information strictly for guidance only, please refer to regulations and manufacturers for information if you are in any doubt.



Protected against the effects of temporary immersion in water between 150mm and 1m.



Protected against continuous submersion at a specified depth.

ACCESSORIES



AC007

Electric element shroud covers. Shown as standard in chrome. Other finishes are available, please contact the sales office for a quote.



*Please be aware that some cover shrouds conceal the element block and cable but NOT the service nut. If unsure, please ask your Dealer for more information prior to ordering.







Arne straight or angled fixing kit.



Crosshead angled fixing kit.

Product 2	Description	Stock or made to order
AC001	1/8" BSP M.I. Self sealing auto vent. All models are fitted with manual air vents. To be specified on order	✓
AC002	1/2" BSP M.I. Decorative air vent and plug	/
AC003	Three point 1/2" BSP adaptor. For electric element and radiator valve link	\checkmark
AC004	19 mm Ø x 100 mm long, electroplated to match towel rail and valves	/
AC005	15 mm Ø x 150 mm long	✓
AC005	22 mm Ø x 150 mm long	✓
AC006	15 mm Ø x 150 mm long	✓
AC007A	Legacy ball joint	✓
AC007B	Contemporary	✓
AC007C	Mitred	✓
AC007D	Flexi (suitable for use with standard element only)	✓
AC007E	Variheat (suitable for use with variheat element only)	/
AC007F	Originals ball joint	✓
AC007G	Electronique (suitable for use with electronique element only)	✓
AC007H	Hexagonal	✓
AC010A	Round 15 mm internal diameter hinged cover plates	✓
AC010B	Square 15 mm internal diameter cover plates	\checkmark
AC011	VL003 (pair) straight or angled valves with cover plates and connection tubes	✓
AC011F	VL008 (pair) angled valves with cover plates and connection tubes	\checkmark



AC012 Voltage Regulator A manual controller to manage power consumption to your towel warmer.



AC013 7 Day Timer This digital controller gives you the facility to pre plan when you will need your towel rail on and off.



AC014 Pattress Plate Housing the wires from the towel rail element if no external controller is required.





Closed

AC037
Pack of 2 Heavy Duty Hollow Wall Fixings



AC023
Clip on chrome towel bar in three widths.



AC035 Blanking Plug with Aroma Oil Dish.







AC031
Clip on frosted sphere and chrome robe hook.

Product 2	Description	Stock or made to order
AC012	Chrome 75W - 400W (1 gang)	√
AC012	Chrome 150W - 1000W (2 gang)	✓
AC013	Digital single channel programme timer (White)	\checkmark
AC014	Covers 1 gang pattress box (Chrome)	✓
AC023A	Chrome 220 mm wide, suitable for MD001, MD005 and MD034	\checkmark
AC023B	Chrome 310 mm wide, suitable for MD001, MD005 and MD034	✓
AC023C	Chrome 405 mm wide, suitable for MD001, MD005 and MD034	✓
AC030	Chrome 443 mm wide, suitable for MD056	✓
AC031	Chrome and frosted sphere. Suitable for MD001, MD003, MD005 and MD034	/
AC032	Stainless steel 450 mm wide, suitable for DR003 and DR021	✓
AC034A	Towel Bar for CN027 - 60mm wide x 200mm wide Chome, White or Anthracite	/
AC034B	Towel Bar for CN027 - 60mm wide x 340mm wide Chome, White or Anthracite	✓
AC034C	Towel Bar for CN027 - 60mm wide x 480mm wide Chome, White or Anthracite	\checkmark
AC035	Oil Aroma Blanking Plug	✓
AC037	Pack of 2 Heavy Duty Fixings	\checkmark

VALVES



Arne VL003
A contemporary classic that works with many designs.



Arne Thermostatic VL004
Controlling the heat of your
towel rail or radiator.



Xero VL012
This modern tap head style suits many bathroom taps and fittings.



Piazza VL014

This cubed valve gives a great finish to our square tube products.



Combination Kit VL013

A combination kit of VL003 straight and angles valves for dual energy option, applicable for all multirail products.



Adapta VL001

A contemporary angled valve, almost not to be noticed.

Dual Fuel Valves VL015
For both central heating and electric dual fuel options.





Valve	Description	Туре	Stock or made to order
Arne VL003	1/2" BSP X 15 mm	Straight	
Arne VL003	1/2" BSP X 15 mm	Angled	
Arne Thermostatic VL004	1/2" BSP X 15 mm thermostatic	Straight	· /
Arne Thermostatic VL004	1/2" BSP X 15 mm thermostatic	Angled	—
Art Deco VL006	1/2" BSP X 15 mm	Angled	✓
Adapta VL001	1/2" BSP X 15 mm	Angled	✓
Crosshead VL008	1/2" BSP X 15 mm	Angled	✓
Excelsior VL010	1/2" BSP X 15 mm thermostatic	Angled	✓
Xero VL012	1/2" BSP X 15 mm	Angled	\checkmark
Piazza VL014	1/2" BSP X 15 mm	Angled	✓
Crosshead 2 VL018	1/2" BSP X 15 mm	Angled	\checkmark
Combination Kit VL013	1/2" BSP X 15 mm	Angled / Straight	✓
Dual Fuel VL015	1/2" BSP X 15 mm	Angled	\checkmark



Art Deco VL006
These valves work well with the hexagonal tube deco designs.



Crosshead VL008

A valve that suits most traditional designs. Our benchmark.



Crosshead 2 VL018
A capstan style valve, which suits ball jointed products.



Excelsior VL010

Thermostatic, a substantial valve in a time honoured design.

Valves are supplied as standard in a chrome finish.

Other finishes are available.

Please contact our sales office on 01902 387000 to discuss your requirements.





COLOURS

Vogue UK Radiator Colours

The colours below are available on many of our ranges carrying the RAL colour symbol. The featured colours have a supplement on the white price. Other RAL colours are available POA.







RAL colours come in a gloss finish as standard, unless specified differently.


The RAL colours in this chart have been matched as closely as possible. The colour depends on the printing or your monitor. We suggest the official RAL colour chart gives the most accurate colour sample.

Vogue UK Contemporary Colour Range



The contemporary colour range is available as a stocked item in three models Serene, Vela and Focus. Latte, Cappuccino, Mocha and Anthracite have a textured finish, with Espresso and Black being gloss. These finishes are also available on other ranges.

Vogue UK Metallic Finishes

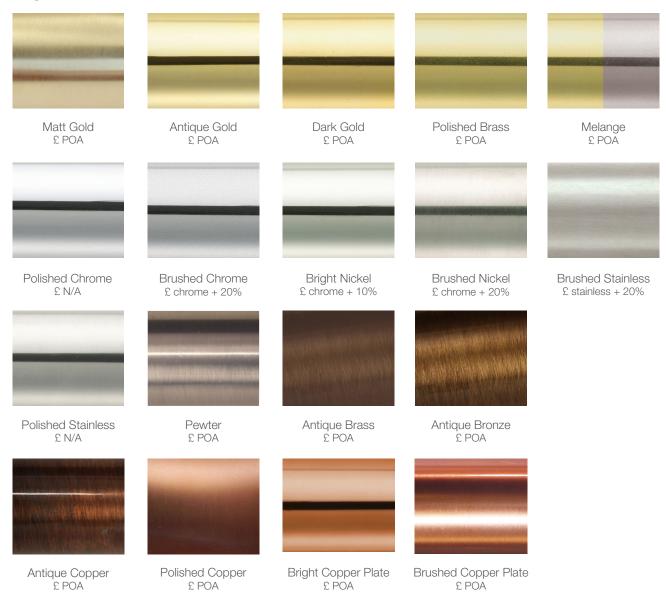

Antique Bronze, Antique Brass & Antique Copper - Due to the reaction of the bronze solution with the base metal there will always be a degree of natural variation in the shade between different components.

Un-lacquered/un-protected polished material will discolour in a short space of time and will need regular cleaning to preserve the finish.

Inset Radiator Range







Convector Column Flat Panel

Vogue UK Joint Range



Ball Joint 1"



Legacy 1.25"



Originals 1.25"



Charlotte 1.5"



Grandeur



The 1909



Art Moderne



Minima Square



Romolo



Art Linea



Mitred



Plain



Contemporary



Minima Round



Valour Bend

Selecting your joint and tube design could not be more flexible.

Our hand made selection of towel rails can be as individual as you are.

Tubing Range



Rope



Reed



Plain



Square



Hexagonal

General terms & conditions

Bespoke items are non-returnable. Please note that certain non-stock models are also non-returnable, please confirm with our Sales Office on telephone +44(0) 1902 387000.

All heat outputs are shown at $50^{\circ}\text{C}\Delta t$, in compliance with BSEN442 - Specification for Radiators and Convectors. To convert to $60^{\circ}\text{C}\Delta t$, multiply heat output by conversion factor 1.268 (approximate figure).

All measurements given are nominal dimensions only (mm), and are not binding. Detailed technical drawings are available on request from our Sales Office on +44(0) 1902 387000 or via our website - www.vogueuk.co.uk

Manufactured from hot brass stamped fittings and high quality brass tube complying to BS2871.

Some models manufactured from high grade CR steel tubing and/or containing steel components suitable for closed/indirect circuits only. All rails are pressure tested to 100p.s.i (6.9 bar) air immersed in water. All models are fitted with 2 x 1/2" BSP F.I. connections. Alternative M.I. or compression fitting is available on request. 3/4" BSP connections available at extra cost on some models.

A manual bleed air vent is fitted to all hot water/dual fuel models. Auto air vents available on request at additional cost.

Pipe centres are provided as centre to centre tappings using the Vogue (UK) range of valves.

In compliance with our policy of constant improvement we reserve the right to alter specifications, materials and dimensions or discontinue any of our products without prior notice.

The colours in the brochure are as accurate as the colour printing processes allow. Photographs for illustrative purposes only. We reserve the right to change specifications without prior notification.

Vogue (UK) Ltd recommends that existing or new pipework is not adjusted until the towel warmer or radiator is installed in its final position.

Products ordered incorrectly or where the specification has changed may incur a re-stock charge. Bespoke/custom made products are non-refundable. Upon the return of a product Vogue (UK) Ltd reserve the right to refuse credit if the product is not made available upon an agreed collection/return in line with the Company's terms and conditions.

A copy of the Company's full Terms and Conditions of Trading is available on request.

Continual Improvement

Our company policy is one of continual improvement and Vogue (UK) Ltd reserves the right to amend designs, specification or discontinue any of our products without prior notice. E & OE

Valves are NOT supplied with each product. Please see Valves & Accessories section for further details.

Tiles provided by British Ceramic Tile Ltd www.britishceramictile.com

Guarantee

Vogue (UK) Ltd is a company that celebrates the wealth of traditional, quality handcrafted heated towel rails and radiators and is one of the last true manufacturers in the UK. Vogue branded towel rails installed within the UK are also covered by an extended 2, 15 or 30 Year Guarantee – subject to Terms & Conditions of guarantee against manufactoring defects. Components such as inset radiators not of our manufacture which become faulty by reason of defected materials are guaranteed to our suppliers 2 year guarantee only.





FN442.1 & 2

Where applicable product within this publication has undergone independent testing to verify heat outputs are in accordance with the parameters laid down in the above European standards. Some products at the time of print may be awaiting confirmation

Construction Product Regulations (CPR)

In compliance with the above, Vogue UK LTD (The company) holds declaration of Performance Certificates (DoPs) for all products covered by the Harmonised Standard EN442.1 / 2. Copies of relevant certificates are available on request.

Product with a declared heat output of 200Watt or less 50 degree C Detla T are not classified by The company as heating appliances and are therefore not covered by the above. All individually manufactured bespoke products are similarly exempted from the above legislation

ISO 9001:2008 certified

Vogue (UK) is proud to be ISO 9001: 2008 certified. Quality is utmost in importance to our organization, in both the products and services we provide our customers. Reflecting this commitment, Vogue (UK) implemented and received certification of our Quality Management System in accordance with ISO 9001:2008.

General

Carriage - Paid UK mainland, excluding requests for next day service, Export carriage can also be arranged. Please contact our Sales Office for details on telephone +44(0) 1902 387000.

INDEX

Model	Code N	Material S	Section	Style	Installaton	Page	Model	Code	Material	Section	Style	Installaton	Page
A							Focus Colour Range	MD001	MS	LR	MR	WM	55 & 56
Accessories	AC		А	AC		133 & 134	G						
Aquila	DR016	MS	CN	DTW	WM	29	Galaxy	MD059	SS	LR	MR	WM	59
Arc	MD065	MS	CN	MTW	WM	28	Gallant	MD040	SS	CN	MR	WM	31
Arcadia	LG017/OG01	7 MS/BF	R TR	TTW	FM	69	Gallant II	MD40	MS	CN	MR	WM	32
Art Moderne FW	OG011	BR	TR	TTW	FW	83	Grace	MD067	MS	CN	MTW	WM	14
Art Moderne II	LG034	BR	TR	MR	WM	85	Grandeur	LG032FW	BR	TR	TTW	FW	77
Art Moderne WM	OG010	BR	TR	TTW	WM	84	Grandeur	LG032WM	BR	TR	TTW	WM	78
Axis B	MD062	MS	LR	MR	WM	51	Н						
Ballerina	LG024/LG02	1 MS	TR	TTW	FW	73	Hamlet	LG037	BR	TR	TTW	WM	80
Ballerina	LG024/LG02		TR	TTW	FW	74	Harmonique	MD060	MS	CN	RTW	WM	46
Ballottila	OG003	17	111				Heating Options			А			130
Ballerina	LG010	MS	TR	TTW	WM	75	1						
Ballerina	LG025/LG01/ LG021/OG00		TR	TTW	WM	76	1						
Baroque	LG021/OG00		R TR	TTW	FM	70	Ideal	MD055	SS	CN	MTW	WM	22
Basin Stands	LG014/0G01	BR	TR	TTW	FW	93	leri	TM014	BR	CN	S	WM	42
Basin Stands		BR	TR	TTW	FW	94	Inttra	CN013	BR	CN	MTW	WM	11
Bathroom Zones		5,1	А			132	J						
Binary	TR002	BR	CN	S	WM	40	Joints & Tubing			А			139
Boxa	CN009	MS/SS	S CN	MTW	WM	23	V						
Butler	LG035/OG00)4 BR	TR	TTW	FW	79	K						
							Kerve	MD036	SS	LR	MR	WM	58
C							Keys II	CN030	MS	CN	DTW	WM	18
Carina	MD051	MS	CN	S	WM	41							
Chic	MD046	MS	CN	DTW	WM	17	Lure Radiator	DR020	MS	DR	VT	WM	108
Chorus	MD002	MS	LR	MR	WM	54	N /						
Chube	MD035	SS	LR	MR	WM	57	IVI						
Colour options and Metallic Finishes			А			137 & 138	Marine	DR009	MS	CN	DR/D	TW WM	8
Combes	MD063	MS	LR	MR	WM	52	Melody	MD004	MS	LR	MR	WM	62
Comby	MD052	MS	CN	MR/S	WM	45	Memo	CN007	MS	CN	MTW	WM	24
Comfort Electric Towel Rail	EL028	MS	Е	ETW	WM	121	Moda	CN001	MS	CN	RTW	WM	26
Concertina	DR010	MS	CN	DR/DT\	N WM	7	Mode Accessories	AC					113
Curvee	MD050	MS	CN	MR	WM	39	Mode Column Radiator	2C/3C/4C	MS	DR	CR	WM	112
Cygnus	DR012	MS	CN	DR/DT\			Mode Electric Radiator	2C/3C/4C	MS	E	CR	WM	120
D	51.012		0,1	51,751			Mode II Radiator Mode Section	CN027 2C/3C/4C/	MS MS	DR DR	CR	WM	109 & 110
Draco	DR015	MS	CN	MTW	WM	10	Radiators	5C/6C	IVIO	DIT	OH	VVIVI	114
F	5.10.10		0.1				Ν						
ECO Electric Radiator	ER001	MS	Е	ER	WM	119	Nexus Grand III	TM003	BR	TR	RTW	WM	89
Electric Element & Dual	2.1001		A		*****	131	Nexus Grand IV	TM004	BR	TR	RTW	WM	90
Fuel Fitted Pricing							Nexus III	TM001	BR	CN	RTW	WM	47
Electric Elements - Standard	EE002/EE003 EE005/EE001		Α	EL		129	Nexus IV	TM002	BR	CN	RTW	WM	48
Electric Under Floor Heating	EUFH		E	UFH		125	Ordinate Radiator	MD005	MS	DR	VT	WM	102
Elizabeth	LG003/OG01			TTW	FW	81		5000		5.1	**		.02
Elizabeth	LG003/OG01		TR	TTW	WM	82	P						
Envirovent Electric Fans	SILD/ECO DMEV/SILM/S		E			123 & 124	Pearl Penthouse	MD058 LG018/OG0	SS 020 BR	LR TR	MR MR	WM WM	60 86
EVO Electric Radiator	ER003	N/A	E	ER	WM	117	Phoenix	DR017	MS	CN	DTW	WM	30
F							Pure	MD037	BR	CN	MTW	WM	13
Flexx	CN015	BR	CN	MTW	WM	12			2.1				-
Flyline Horizontal Radiator	DR004/ DR004DP	MS	DR	FR	WM	106	Quadrate	MD074	MS	CN	MTW	WM	27
Flyline Vertical Radiator	DR003/ DR003DP	MS	DR	FR	WM	105	Quilt Radiator	DR021	SS	DR	FR	WM	99
Focus	MD001	MS	LR	MR	WM	53							

Model	Code M	aterial Se	ection	Style	Installaton	Page
R						
Regency	LG004/OG006	MS/BR	TR	TTW	FW	67
Regency	LG005/OG015	MS/BR	TR	TTW	WM	71
Regency II	LG036/OG009	MS/BR	TR	TTW	WM	68
Regency Tall	LG013/OG007	MS/BR	TR	TTW	FW/ WM	72
Romantique Electric Radiator	4C	CI	Е	CR	WM	118
Rubik	MD038	SS	CN	MTW	WM	19
S						
Sequel III	TM005	BR	TR	RTW	WM	92
Sequel V	TM006	BR	TR	RTW	WM	91
Serenade Radiator	DR008	MS	DR	FR	WM	104
Serene	MD049	MS	CN	MR	WM	21
Sesto Rondo III	MD021	BR	TR	MR	WM	87
Shower Curtain Rails	SCR1 - 6	BR	TR		WM	95 & 96
Simplicity Arc & Linc	EL022/EL025	SS	Е	VT	WM	122
Simplicity IV	IVCN026	BR	CN	TTW	WM	38
Smooth	CN035	MS	CN	MTW	WM	15
Smooth II	CN036	MS	CN	MTW	WM	16
Solo	TR001	BR	CN	S	WM	40
Sonata Radiator	DR007	MS	DR	VT	WM	107
Squire	MD047	MS	CN	MR	WM	20
Squire Vertical Radiator	DR005	MS	DR	DR	WM	103
Stella	MD034	SS	LR	MR	WM	63
Stendy	SY	MS	CN	MR/S	WM	44
Stendy Quad	SR	MS	CN	MR/S	WM	43
Stromboli Electric Radiator	ER002	MS	E	ER	WM	119
Studio	MD006	BR	LR	MR	WM	64
Suave Radiator	MD056	MS	DR	FR	WM	100
Tune	MD003	MS		MR	WM	61
V						
Valves	VL		А	VL		135 & 136
Vela	MD048	MS	CN	MR	WM	33
Venture	CN022	BR	CN	TTW	WM	34
Vintage	LG010B	BR	TR	TTW	WM	88
Vision Mirrored Radiator	DR022	MS	DR	VT	WM	101
Vista	IN002	SS	CN	MTW	WM	25
Vivid	CN021	BR	CN	TTW	WM	35
Vivid IV	IVCN021	BR	CN	TTW	WM	36
Vivid IV Horizontal	IVCN021	BR	CN	TTW	WM	37
Z						
Zenith	IN007	SS	CN	MTW	WM	26

Innovation

Vogue UK is a vibrant organisation with research being conducted in many technology disciplines. This research results in exciting products as evidenced throughout the design collections we offer. Vogue UK has set itself a clear objective: both through consistent preservation and long tradition of British craftsmanship and meeting its high standards, as well as creating, with its very own innovative heating developments, contemporary design and a heightened passion for detail and perfection.

Those who appreciate lasting value derived from the synergy of traditional craftsmanship, creative development and the latest technology, as well as dedication in seeking the extraordinary know not to entrust any towel rail design but rather to a design crafted from Vogue (UK).

Vogue UK emphasises its creative drive to differentiate its towel rail designs down to the finest detail and its desire to monitor, to the greatest possible extent, the development and manufacture of a hand crafted product. We use the latest technology to produce low-volume individual parts with high added value continuously offering home interiors and connoisseurs of design new, impressive towel rail models.

Environment

Vogue UK has a legacy of core values, rooted strongly in safety, health and environmental stewardship. For 25 years, we have been reducing the environmental footprint of our own operations. Today, footprint reduction is expected of all companies. The challenge - and the opportunity - are products and manufacturing processes that are safer, less toxic, more energy efficient, use less water, less energy, and produce fewer greenhouse gases. Running our company in an environmentally friendly way is good for the environment and good for our business. We're working to conserve energy and reduce waste and are exploring the use of sustainable materials and products. Whether we're saving costs by reducing energy consumption or creating covetable products through innovative, sustainable design, we believe that reducing our impact on the environment can also result in positive business benefits.

>	
Ш	
$\overline{\mathbf{X}}$	
×	
	į
Ш	
\leq	

Material	Section	Style		Installation
BR Brass	CN Contemporary	C Column radiator	MTW Modern towel warmer	FM Floor Mounted
MS Mild Steel	LR Ladder Rails	DR Designer radiator	RTW Radiator towel warmer	WM Wall Mounted
SS Stainless Steel	TR Traditional	DTW Designer towel warmer	S Shelf	F/WM Floor and Wall Mounted
CI Cast Iron	DR Design Radiators	ER Electric radiator	TTW Traditional towel warmer	
	E Electric	FR Flat Radiator	UFH Under floor heating	
	A Additions	MR Multirail	VT Vertical tube	



Vogue (UK) Ltd Strawberry Lane Willenhall, West Midlands WV13 3RS United Kingdom

T: +44(0) 1902 387000 F: +44(0) 1902 387001 E: info@vogueuk.co.uk W: www.vogueuk.co.uk

Sales Office

T: +44(0) 1902 387020 F: +44(0) 1902 387021

E: sales@vogueuk.co.uk

