




where inspiration flows

CAMEO

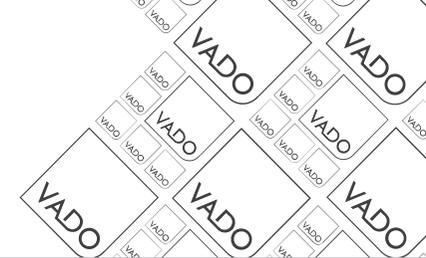


Installation Guide
Extended basin mixer

This instruction booklet covers these models:

CAM-100E, CAM-200E
(All finish options)

CAM-100E
CAM-200E

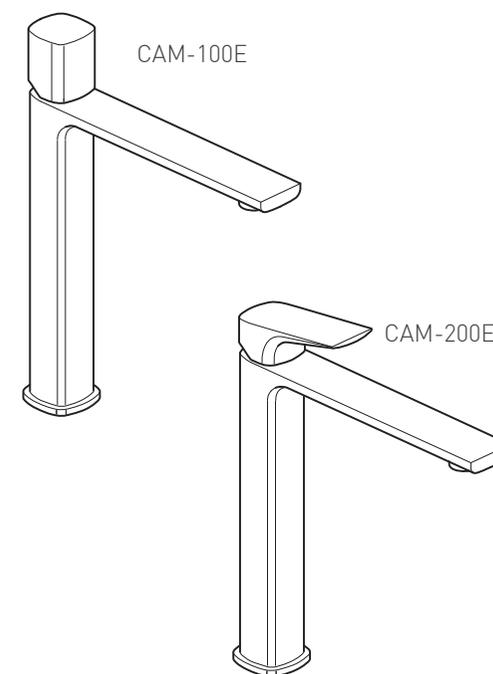

⚠ Cleaning Instructions

If these instructions are not followed, your guarantee may be invalidated.

- Clean only with water and a soft damp cloth
- Do not use any aggressive/corrosive cleaning products
- Do not use abrasive cloths

Due care needs to be taken to ensure the appearance is retained.
For further cleaning instructions, please consult this product's user guide.

Keep for future reference

Vado
Wedmore Road, Cheddar, Somerset, England BS27 3EB
tel 01934 744466. fax 01934 744345
aftersales@vado.com
www.vado.com



Important - Please Read

Please read these instructions carefully before starting installation and keep for future reference.

Remove all packaging and check the product for missing parts or damage before starting installation.

Any alterations made to this product and fittings may infringe water regulations and will invalidate the guarantee.

The installation must comply with all Local/National Water Supply Authority Regulations/Byelaws and Building and Plumbing Regulations.
To be installed in accordance with BS EN806.

We strongly recommend that you use a qualified and registered plumber.

General Installation

This fitting is a mixing device and therefore water supplies should be reasonably balanced.

When installed, the fitting must comply with the requirements of the Water Supply (Water Fittings) Regulations 1999 and Scottish Byelaws 2004.

For further information, contact the Water Regulations department of your local water supplier (see the WRAS website www.wras.co.uk for details) or the Water Regulations Advisory Scheme by email (info@wras.co.uk) or telephone: 01495848454.

Before making any inlet pipe connections, all supply pipes MUST be thoroughly flushed to remove debris. Failure to do so could result in damage or low flow from the mixer unit. Water Supply (Water Fittings) Regulations 1999 Schedule 2 Section 13.

The fitting of isolating valves to the inlet feeds is advised for ease of maintenance.

Please take great care when installing this mixer not to damage its surface.

Please note if installing in an enclosed environment, access should be left for servicing and maintenance. No costs relating to inadequate access can be accepted.

Operating Specifications

Operating Pressure

Minimum operating pressure **1 bar***


Maximum operating pressure **5 bar**

* **0.2 bar** if using Low Pressure variant


Contents of Packaging




Installation guide &
User manual
to suit your model

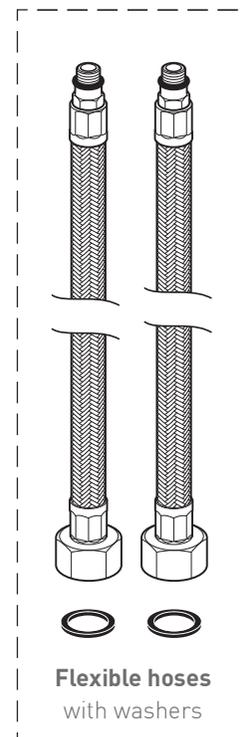

Flexible hoses
with washers

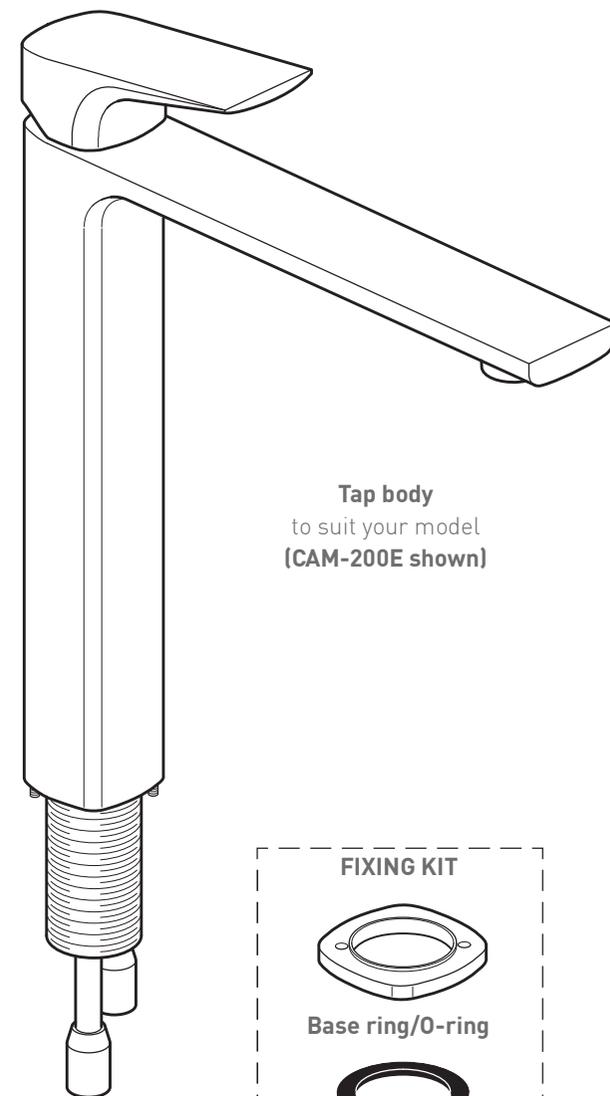

Tap body
to suit your model
(CAM-200E shown)

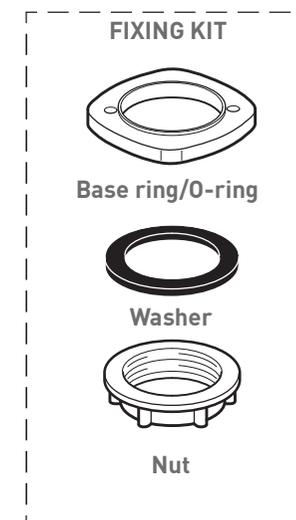


FIXING KIT



Base ring/O-ring




Washer




Nut



Dimensions - CAM-100E

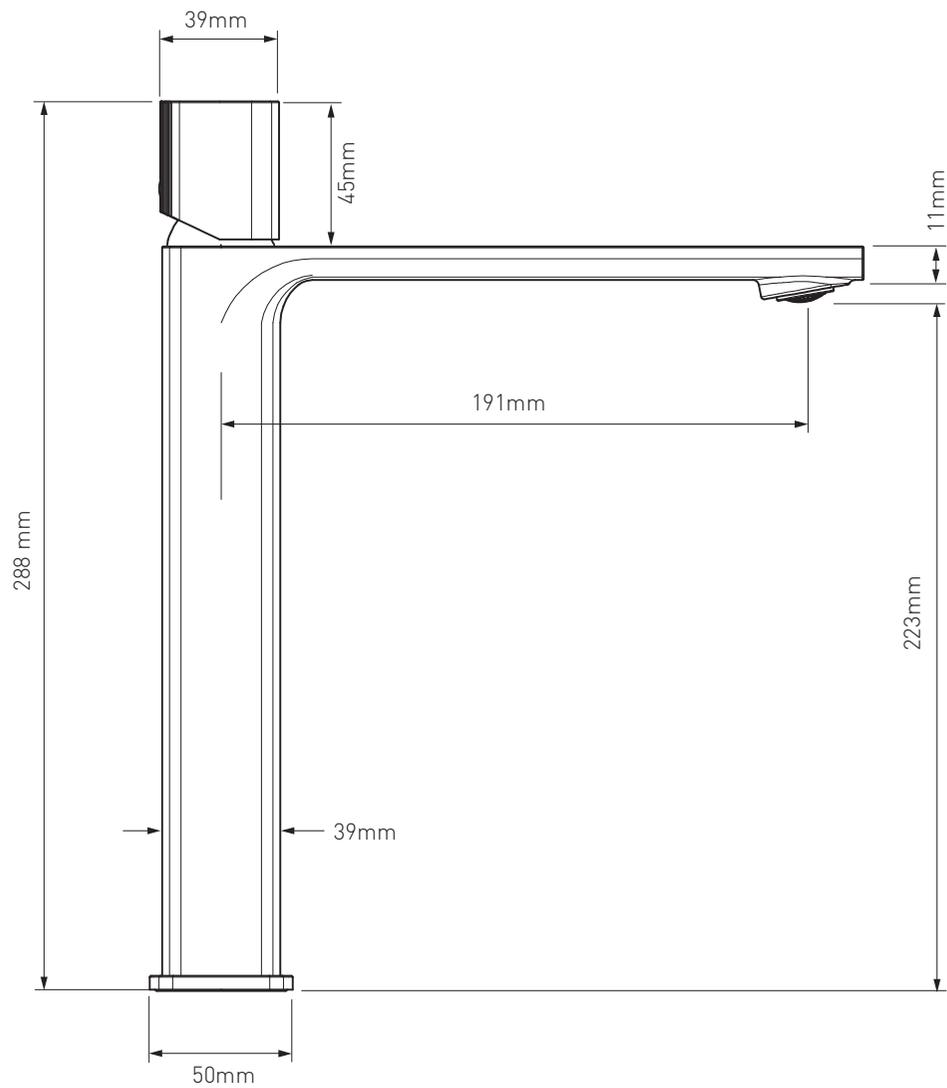

Dimensions - CAM-200E

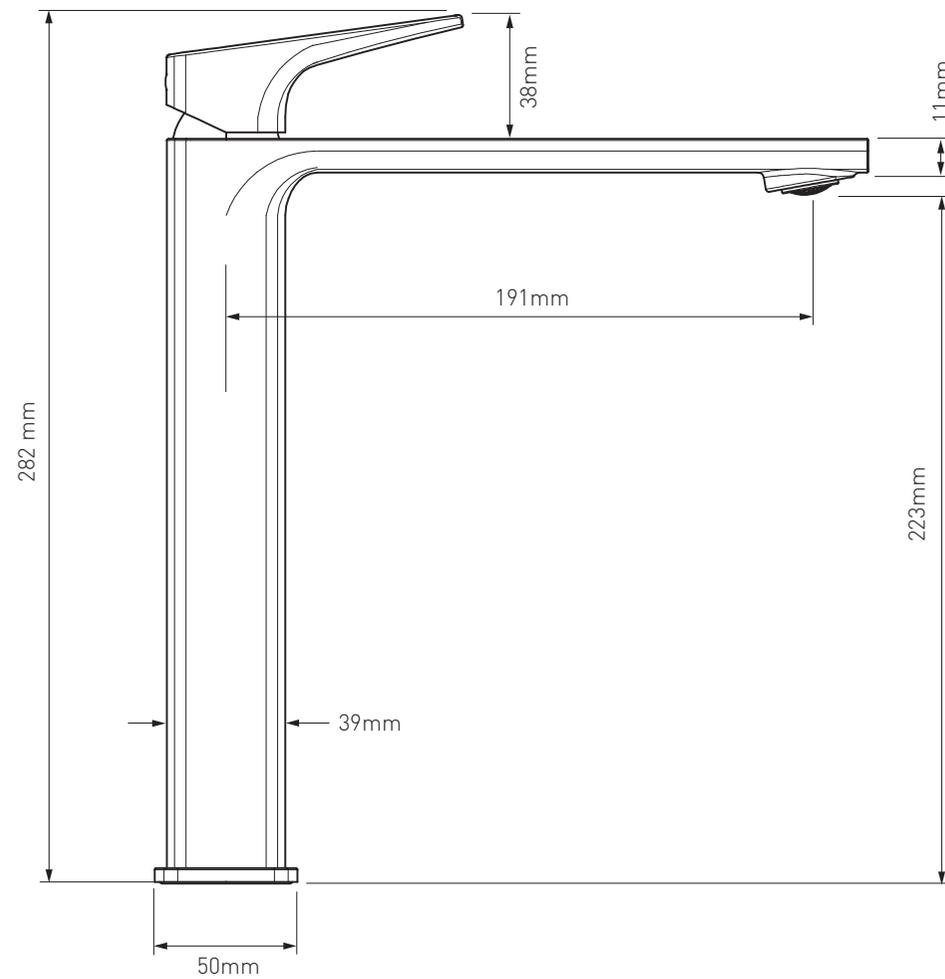

Installation - Quick Guide

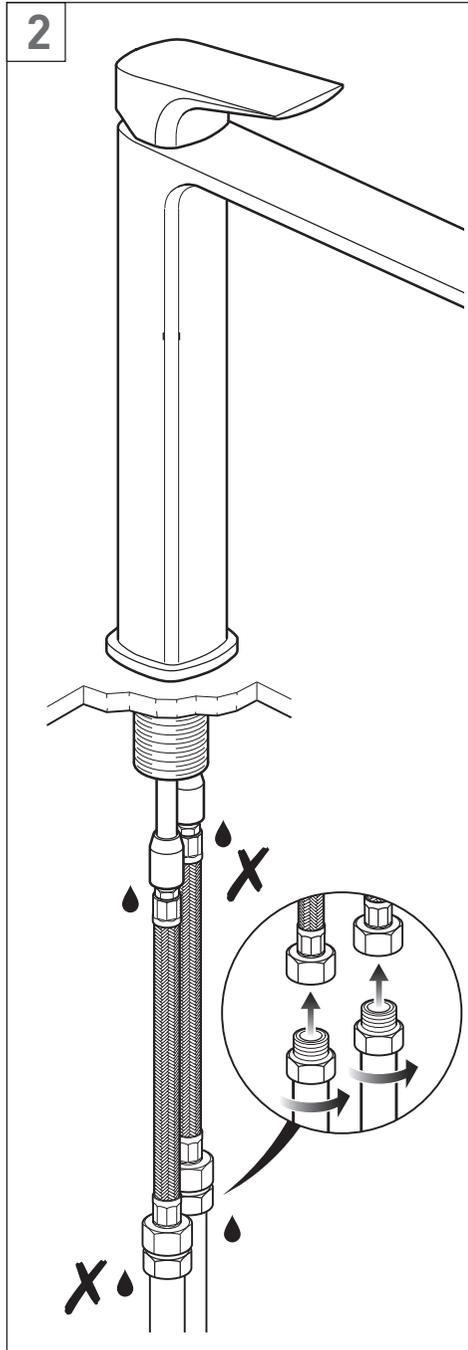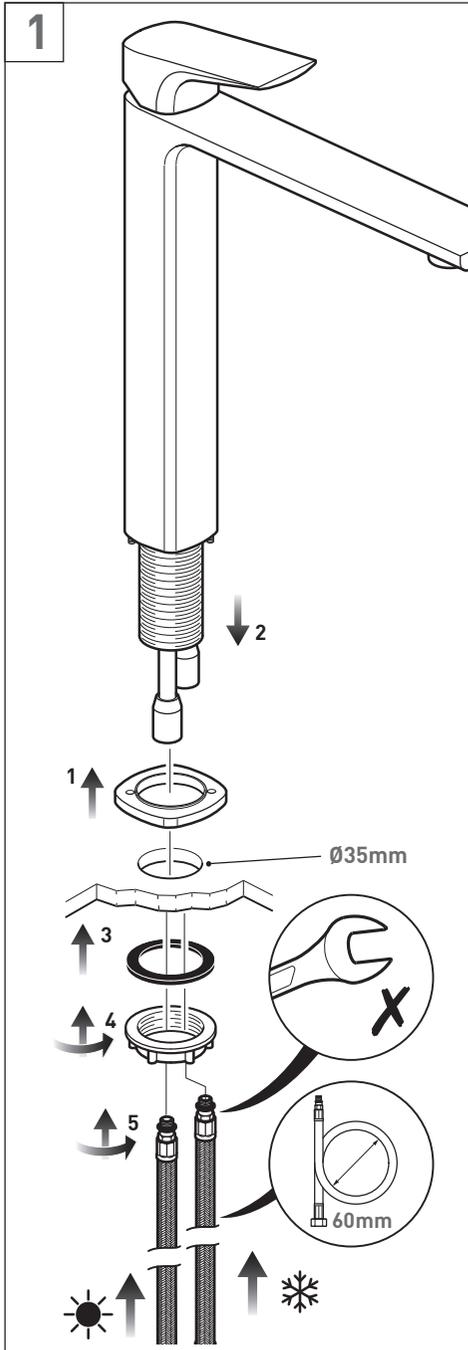

Installation

Please note: For illustration purpose the **CAM-200E** is shown throughout this installation. Please follow the same procedure for the **CAM-100E**.

Before installing your new mixer, flush through the pipe work to ensure removal of debris, turn off the water supply.

Place the base ring onto the underside of the mixer making sure the holes line up with the locator screws. Ensure the O-Ring is in the groove of the base ring.

Position the mixer on the basin. From the underside of the basin screw the two flexible pipes to the hot and cold connections in the mixer body, the **hot** should be to the **left** and the **cold** to the **right**, hand tighten only.

Slide the washer over the connection tube followed by the nut the rubber washer should be on top. Tighten the nut to clamp the mixer to the basin.

CAUTION: Do not over tighten the nut as this may damage the basin.

Connect the water supply to the inlet pipes. The **hot** water should be connected to the **left** pipe and **cold** to the **right**.

CAUTION: When installing the flexible hoses **do not** kink, or bend them more than the 60mm diameter as shown right.

